


Encoder Controlled Single Channel Programmable DC Power Supply



Encoder Controlled Single Channel Programmable DC Power Supply

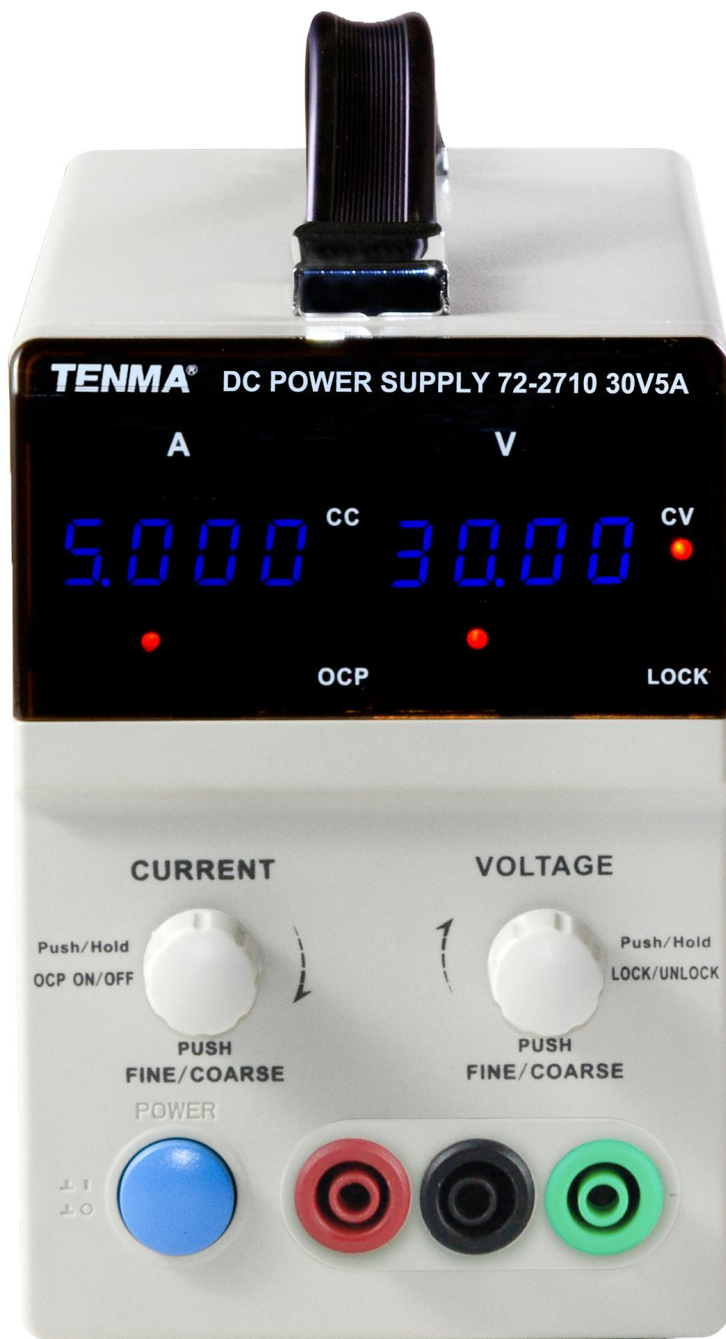

Specifications Table

Performance		72-2710
Channels		Single Channel Programmable
AC Input Voltage		230V ±10% / 50Hz, 110V, 220V ±10% / 60Hz
Output Voltage Range		0 - 30V
Output Current Range		0 - 5A
Load Regulation	Voltage	≤0.01% + 2mV
	Current	≤0.1% + 5mA
Line Regulation	Voltage	≤0.01% + 3mV
	Current	≤0.1% + 3mA
Setup Resolution	Voltage	10mV
	Current	1mA
Setup Accuracy (25°C ±5°C)	Voltage	≤0.5% + 20mV
	Current	≤0.5% + 10mA
Ripple (20Hz - 20MHz)	Voltage	≤2m Vrms
	Current	≤3m Arms
Temperature Coefficient	Voltage	≤150ppm + 10mV
	Current	≤150ppm + 5mA
Read Back Accuracy	Voltage	10mV
	Current	1mA
Read Back Temperature Coefficient	Voltage	≤150ppm + 10mV
	Current	≤150ppm + 5mA
Reaction Time (10% Rated load)	Voltage Rise	≤100ms
	Current Drop	≤100ms
Interfaces		RS-232, USB
Accessories		User Manual, Power Cord, USB Cord, Software CD, UK Plug, Euro Plug, US Plug
Weight		4.82kg
Dimension (W × H × D)		110mm × 156mm × 260mm

Part Number Table

Description	Part Number
Encoder Controlled Single Channel DC Power Supply, Programmable, 150W	72-2710

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell Limited 2016.

