


NO	DESCRIPTION	DATE
⚠	MODIFICATION PART ①②③ 5.7 → 6.46	11.22.05'
⚠	WORKING VOLTAGE —— VOLTAGE RATING DEL PROOF VOLTAGE	04.11.14'

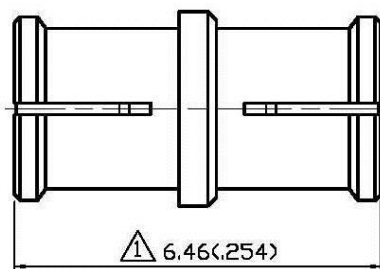

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-40 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 335 VOLTS MAX. ⚠
- 1.4 VSWR: 1.15MAX. @26.5 GHz
1.4 MAX @40 GHz

2.0 MATERIALS

- 2.1 BODIES: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
3	INSULATION	TEFLON	1	NONE
2	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 30μ" MIN.
1	BODY	BERYLLIUM COPPER	1	GOLD 3μ" MIN.

APPROVED by _____ DATE: _____



DESCRIPTION		STRAIGHT SMP JACK-JACK ADAPTER		品名	48-10	T.G.G	DATE	版次	REV.
製圖	DRAWN	TOLERANCE	品名	48-10	T.G.G	DATE	08.27.02'	版次	A-2
	Yoko	.X ±0.2	TITLE	\ROHS COMPLIANT (50Ω)		日期			
檢圖	CHECK	.XX ±0.1	單位	DWG.NO.	48-0010	SCALE			
	Arc	.XXX ±0.05	mm(ln)						
認定	APPROVAL	ANGLE ±5°	比例						
	Angela		10:1						