

Time-Lag Miniature Cartridge Fuses 6mm × 30mm

multicomp PRO

**RoHS
Compliant**



Description

These time-lag fuse provides protection for printed circuit boards and is used in a large variety of applications that need fuses with time-delay, high interrupting rating and voltage rating characteristics. This 6mm × 30mm device is constructed of a glass tube with electro-plated brass end caps. These fuses offers excellent quality and is 100% tested for cold resistance and precise length.

Mechanical Specifications

Materials

Tube	: Glass Tube
End Caps	: Nickel plated brass
Axial Leads	: Nickel plated caps
Operating Temperature	: -55°C to 125°C
Storage Conditions	: +10°C to +60°C
Relative humidity	: ≤ 75% yearly average without dew, maximum 30 days at 95%
Vibration Resistance	: 24 cycles at 15 min. each (60068-6) 10-60Hz at 0.75mm amplitude 60-2000Hz at 10g acceleration

Electrical Specifications


Time vs Current Characteristics Table

(measured with constant current power supply)


Time vs Current Characteristics: UL248-14			
Rated current	100%	135%	200%
1.5A to 10A	>4h	<1h	5s~60s
10A		-	<120s

Time vs Current Characteristics: UL248-14			
Rated current	275%	400%	1000%
1.5A to 10A	-	-	-
10A	600ms~10s	150ms~3s	20ms~300ms

Average Time Current (I-T) Curves

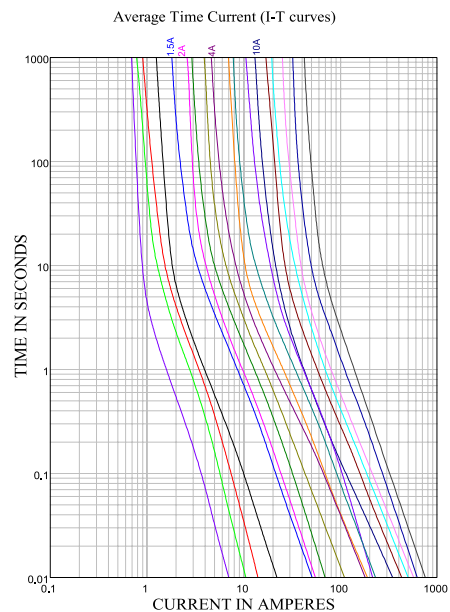

Mechanical Specifications

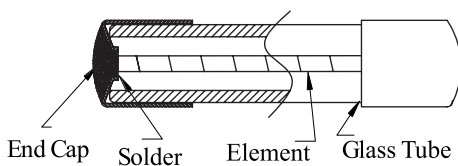

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO

Time-Lag Miniature Cartridge Fuses

6mm × 30mm




Electrical characteristics at 25°C

Part Number	Amp	Rated Current	Nominal Melting $I^2t(A^2sec)$	Typical Cold Resistance (mΩ)	Breaking Capacity
MP007109	1150	1.5A	26.01	210	10KA@125V AC 100A@250V AC
MP007106	1200	2A	30.25	124.4	
MP007107	1400	4A	324	37	10KA@125V AC 200A@250V AC
MP007108	2100	10A	1190	8.3	400A@125VAC 200A@250VAC

Note:


1. Permissible continuous operating current is $\leq 100\%$ at ambient temperature of 23°C (73.4°F)
2. The current values used for calculating I^2T should be within the standard range of 8ms ~ 10ms.

Soldering Parameters

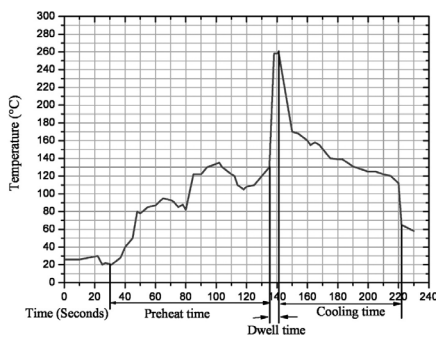

260°C ≤5 sec (Wave Soldering)
 350°C ≤3 sec (Hand Soldering)
 Soldering Peak:
 260°C - 10 sec (IEC 60068-20)

Diagram



Part Number Table

Description	Part Number
Time-Lag Miniature Cartridge Fuse, 1.5A, 250V AC, 6mm x 30mm	MP007109
Time-Lag Miniature Cartridge Fuse, 2A, 250V AC, 6mm x 30mm	MP007106
Time-Lag Miniature Cartridge Fuse, 4A, 250V AC, 6mm x 30mm	MP007107
Time-Lag Miniature Cartridge Fuse, 10A, 250V AC, 6mm x 30mm	MP007108

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

