

### **Features**

- USB 3.0
- Type A
- Male to Male
- 5 Gbit/s (625 MB/s)
- White

# RS PRO 80CM USB 3.0 A Male to Male Cable - White

RS Stock No: 266-8499



RS Professionally Approved Products bring to you, professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



#### **Product Description**

The RS PRO range of SuperSpeed USB Type A (male) to Type A (male) cables support a data transfer rate up to 5 Gbit/s (625 MB/s), which is about ten times faster than USB 2.0 technology.

This is a Type A to A cable; it is designed to connect a Host to a Device. These cables are often used to connect a Host computer to a faceplate with a Type A socket.

Please note: This is not used to connect two computers together. Attempting to do so may damage equipment.

The official name for this cable would be USB3.2 Gen 1. (Previously known as USB3.1 Gen 1 and USB 3.0)

#### **General Specifications**

USB Type	USB 3.0
Connector A	Male USB A
Connector A Type	USB 3.0
Connector A Gender	Male
Connector B	Male USB A
Connector B Type	USB 3.0
Connector B Gender	Male
Connector Style	Straight
Data Transfer Rate	5Gbps
Outer Sheath Material	PVC
Sheath Colour	White
Connector Plating	Nickel
Pin Construction	Copper

#### **Approvals**


Standards Met CE UKCA ROHS REACH


#### **Similar Products**

Stock No.	Length	Spec	Pack Size	Colour
266-8499	80cm	USB3.0 A Male to Male cable	5	White
182-8914	80cm	USB3.0 A Male to Male cable	1	White
266-8464	1m	USB3.0 A Male to Male cable	5	Blue
182-8842	1m	USB3.0 A Male to Male cable	1	Blue
266-8465	2m	USB3.0 A Male to Male cable	5	Blue
186-3052	2m	USB3.0 A Male to Male cable	1	Blue

## **USB** Cables



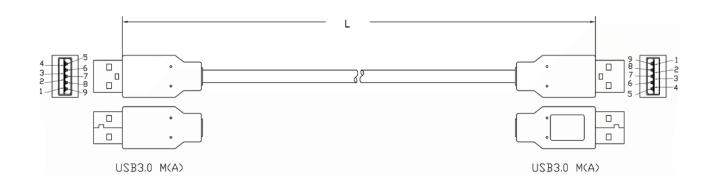



1. CABLE:UL:2725,AL+B-F0IL,(30AWG\*IP)+[AL+MY-F0IL,(30AWG\*IP+D)]\*2+24AWG\*2C.
COLOR,DD=5.5mm,PVC JACKET.

BRAID

\_\_(1PAIR+D)\*2 \_\_\_MY \_\_\_AL

- COLOR,OD=5.5mm,PVC JACKET.

  2. LENGHT

  3. CINNECTORS:USB3.0 M(A)\*2PCS(BLUE INSULATOR).

  4. MOLD:MOLDING USB TYPE.

  5. CONTACTS:
  WHITE/GREEN PAIR...30AWG , RED/BLACK...24AWG

  6. OPEN/SHORT TEST: 100% TEST.
  INSULATION: 2M.