


Datasheet

Stock No:1707012

RS Pro STRAIGHT N PLUG- 1.0/2.3 JACK ADAPTER

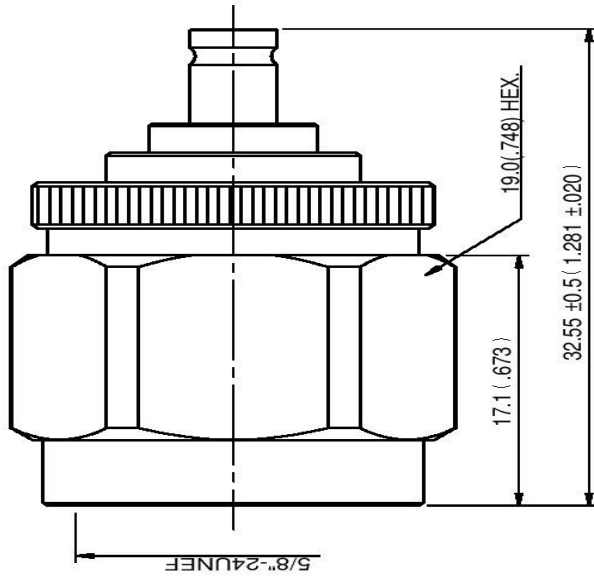

- 1.0 ELECTRICAL**
 - 1.1 FREQUENCY RANGE: DC - 6 GHz
 - 1.2 NOMINAL IMPEDANCE: 75 OHMS
 - 1.3 VOLTAGE RATING: 250 VOLTS MAX.
 - 1.4 VSWR: 1.2 MAX.
- 2.0 MATERIALS**
 - 2.1 BODIES: BRASS PER JIS-C3604
 - 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 (UNS C17300)
 - 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- 3.0 FINISHES AND OTHERS**
 - 3.1 SEE BELOW TABLE FOR DETAILS.
- 4.0 MECHANICAL**
 - 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-3488
DIN 41626-2
- 5.0 ENVIRONMENTAL**
 - 5.1 OPERATING TEMPERATURE RANGE: -55 C TO +125 C

NO	DESCRIPTION	MATERIAL	QTY	FINISH
8	INSULATION	TEFLON	1	NONE
7	INSULATION	TEFLON	1	NONE
6	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 3 μ" MIN.
5	WASHER	BRASS	1	NONE
4	BODY	BRASS	1	NICKEL 100 μ" MIN.
3	GASKET	SILICONE	1	NONE
2	SHASSIS	BRASS	1	NICKEL 100 μ" MIN.
1	SHELL	BRASS	1	NICKEL 100 μ" MIN.

APPROVED by DATE: -----

DESCRIPTION	TOLERANCE	品名	4011100470001	DATE	REV.
STRAIGHT N PLUG- 1.0/2.3 JACK ADAPTER		TITLE	ROHS COMPLIANT	11.29.17	A-0
DRAWN	±0.2	UNIT	DWG.NO.		
Jackie	.XX ±0.1	mm(m)	11-0847-Z		
CHECK	.XXX ±0.05	SCALE			
Arc	ANGLE ±5°	比例			
APPROVAL					
Jenny					