




Datasheet

RS PRO Push Mount Tie

Stock number: 178-9500

EN


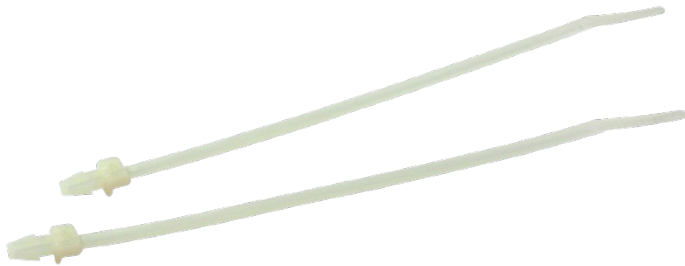


- UL approved Nylon 66, 94V2
- Press the tie into a pre-drilled hole and bind the cord by securing the tie.

Features:

- Easy to assemble without the need for a tool

- Cable tie head always situated in defined position
- Arrowhead simply locks into place
- Supporting legs provide a secure and firm fixing in areas where space is limited

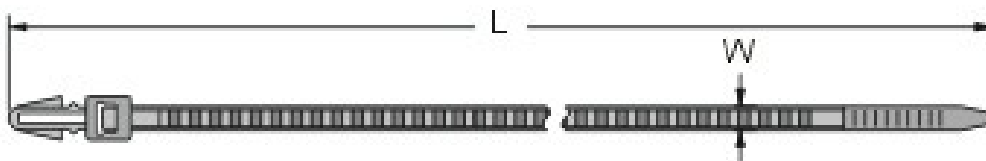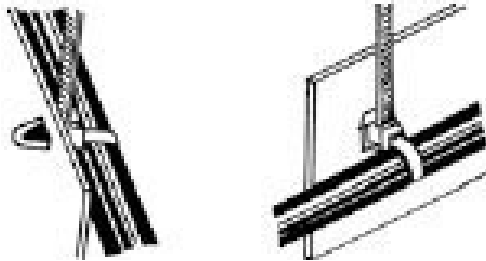

RS ITEM NO.	Length		Width	Max. Bundle Dia.	Mounting Hole	Chassis Thickness	Min Loop Tensile Strength		Packing
	L		W				lbs	kgs	
	mm	inch							
1789500	168	6 1/8"	3.8	40	4.8	3	40	18	100 pcs