



Datasheet

ENGLISH

Shield Anchor – Projecting Bolt

Product

A torque controlled shield anchor suitable for use in concrete and solid brickwork

Material



Carbon Steel

Standard colour

Yellow

Finish

Zinc Plated and Yellow Passivated min 5µm

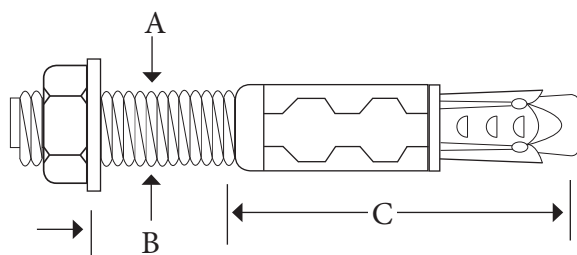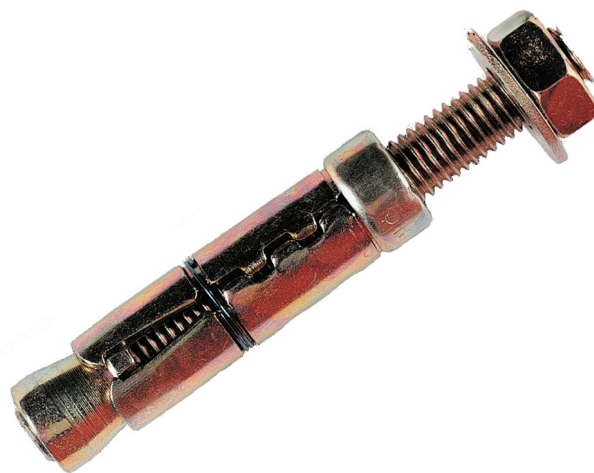

Part Number	Thread Diameter	Maximum Fixture Thickness	Shield Length	Drill Diameter	Minimum Hole Depth	Rec. Tensile Resistance	Rec. Shear Resistance	Tightening Torque
	A	B	C					
	mm	mm	mm	mm	mm	kN	kN	Nm
9086854	6	10	45	12	50	2.9	1.9	6
9086858	6	25	45	12	50	2.9	1.9	6
9086867	6	50	45	12	50	2.9	1.9	6
9086860	8	15	50	14	55	5.0	3.5	14
9086864	8	40	50	14	55	5.0	3.5	14
9086873	10	10	60	16	65	8.1	5.6	27
9086876	10	30	60	16	65	8.1	5.6	27
9086870	10	50	60	16	65	8.1	5.6	27
9086889	12	15	75	20	85	11.3	8.1	46
9086882	12	25	75	20	85	11.3	8.1	46
9086886	12	70	75	20	85	11.3	8.1	46