


DWG No: 20201060

REV:	Description:	BY:	DATE:
-	CREATED	MJ	19/11/20
A	-	-	-
B	-	-	-
C	-	-	-
D	-	-	-
E	-	-	-
F	-	-	-

CONFIDENTIAL DOCUMENT! THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RS PRO. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF RS PRO IS PROHIBITED.  
 The cable assy should comply with the European Parliament and the Council Directive: 2011/65/EU for the restriction of hazardous substances (ROHS). The manufacturer will provide a certification proving the ROHS compliance of the cable assy whenever a customer requires this.

BNC Female to Terminal Block 2pin,  
 Nickel Plated, Rohs Compliant

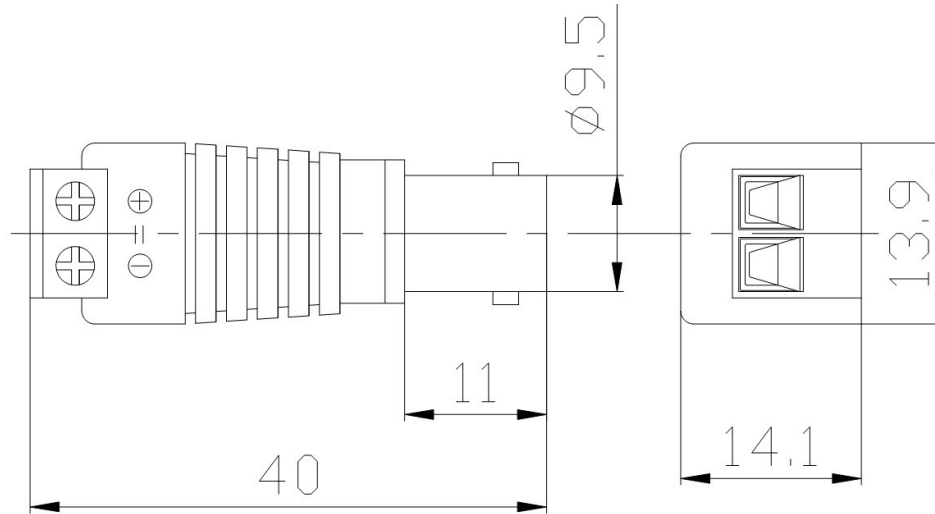

operating temperature : -50°C-68°C  
 voltage range: 0~12V  
 Maximum carrying current: 3A  
 maximum power : 36W



±0.2mm



TOLERANCES: .XXX ±.025mm .XX ±.100mm .X ±.250mm  Wire Length: 0-100 ±5mm 101-300 ±10mm 301-500 ±15mm 501-<1000 ±20mm 1000-<2000 ±50mm 2000+ ±100mm	DESC:	BNC Female - Terminal Block 2 Pin		APPROVED:  <b>YES / NO</b>
	P/N:	CLB-JLB75		
	F/C:	CLB-JLB75	DATE:	
PAGE: <b>1 of 1</b>	PROJECTION:	UNIT: <b>MM</b>	NAME: SIGNATURE:	

