



Datasheet

RS PRO Grey PVC Open Slotted Trunking



Stock number: 758-9250 758-9254 758-9257 758-9266

EN



SPECIFICATION

- **Material:** High impact, warp-proof PVC , self-extinguishing .
- **UL approved 94V-0.**
- **Color:** Grey
- **Maximum service temperature:** 85°C
- **Test to UL file E97527 up to 50°C.**
- **Supplied complete with cover.**
- **These devices are for routing of wires within devices in factory installations.**
- **Features parallel holes on both sidewalls to facilitate cutting in wire application.**
- **Easy to insert, adding or removing wires - even with terminations attached.**
- **Save your total cost for during installation, wire tracing and circuit troubleshooting.**

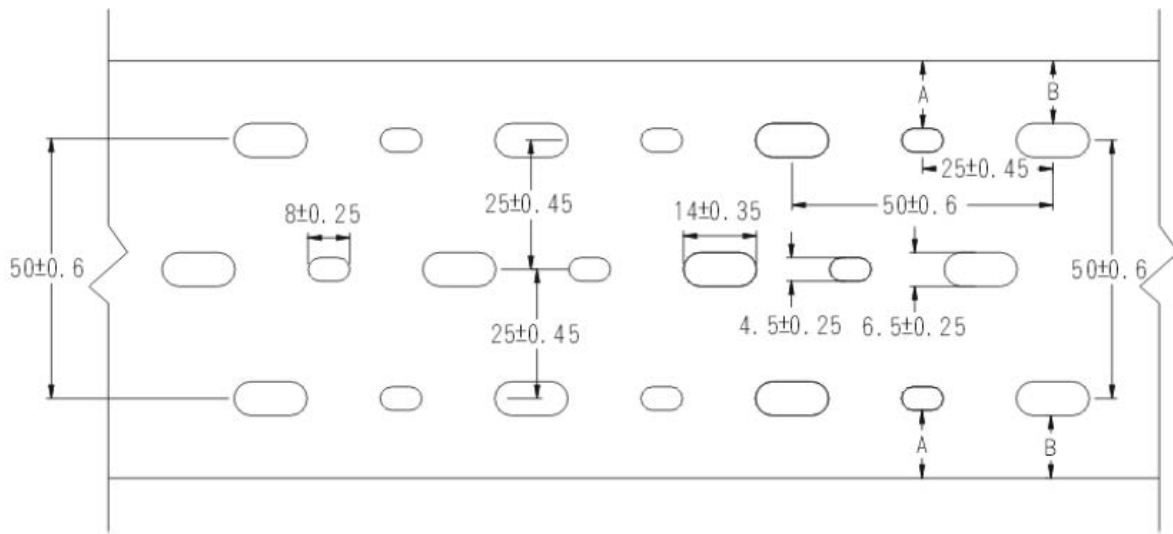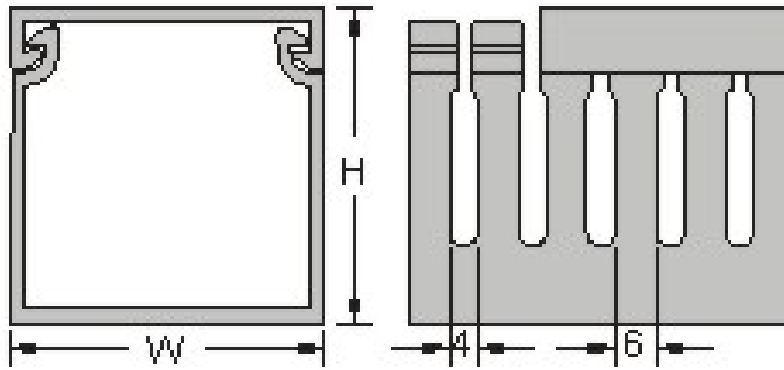

RS Article No	W(mm)	H(mm)	A	B	Slot	Length
758-9250	100	40	22.75	21.75	4mm	2M
758-9254	100	80	22.75	21.75		
758-9266	120	60	32.75	30.75		
758-9257	80	100	12.75	11.75		