

Specifications


	ABI-057-RC
Rated voltage	5VDC
Operating voltage	3~7VDC
Rated current*	$\leq 25\text{mA}$
Sound output at 10cm*	$\geq 80\text{dB}$
Resonant frequency*	$2730 \pm 300\text{Hz}$
Tone	Continuous
Operating temperature	-20~+80°C
Storage temperature	-30~+85°C
Weight	1g

*Value applying at rated voltage (DC)

All data at 25°C unless otherwise specified

Features

- ROHS compliant
- Housing material: PBT
- Wave solderable and washable

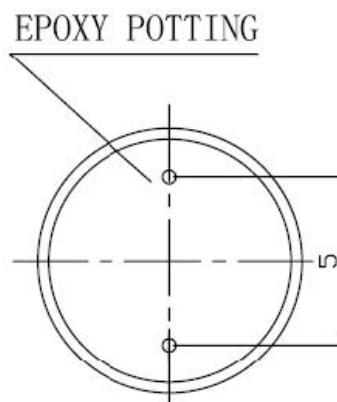

Dimensions Unit: mm Tolerance: $\pm 0.5\text{mm}$

