

| R5 |
|-----|
| PRO |

EN

Datasheet

RS PRO Hermetically Sealed Enclosures

Stock number: 1920718





Product Details

Hermetic enclosure ideal for applications requiring protection against water ingress. Supplied with silicon gascet that provides IP64 rating. Lid manufactured with recess for mambrane keypads and overlays.

Features and Benefits

- Made of ABS
- Available in light gray color
- Protection against liquids and solid objects: IP64 rating
- Shock protection level: IK07
- Supplied with silicon gasket and four screws
- Lid with recess for keypads and overlays





| Category | Special Enclosures with display space |
|------------------------|---------------------------------------|
| Туре | Full |
| Material | ABS |
| Variant | Hermetic (with gasket) (H) |
| Height | 38.5 mm |
| Width | 144.6 mm |
| Length | 184.7 mm |
| Color | Light gray (J) |
| Protection level | IP64 |
| Shock protection level | IK07 |
| Standards Met | RoHS Compliant |
| Accessories | Screw 3/30: 4.0 pcs |
| Certificate number | CE/031/18 |
| | |












Max PCB size

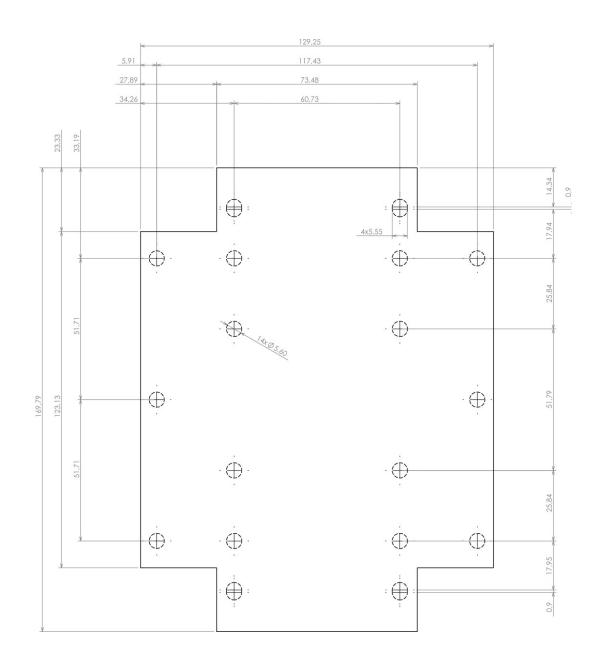

Dashed line shows outline of the mounting boss under PCB board Recommended mounting holes diameter ø4mm All dimensions are given within +/-0,5mm tolerance



