


Datasheet 4R20- 4R25

RS Stock No: 7904690



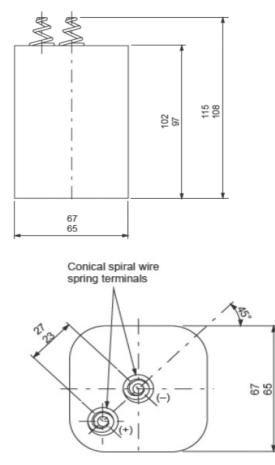


Dimensions (mm)

CARACTERISTIQUES ELECTRIQUES ELECTRICAL CHARACTERISTICS	
IEC	4R25X
Couple chimique / Chemical system	Primary Zinc Chloride
Tension nominale / Nominal Voltage	6V
Capacité nominale / Nominal Capacity	6600mAh (15 , 24h/d, 20°C, e.v. : 3.6V)
Température de fonctionnement / Operating	
temperature	-30°C ~50°C
Teneur en métaux lourds/Hevay metal contents	0% Hg
	Boitier Plastique / Plastic casing
Details	Ressorts / Springs
Poids / Weight	540 gr

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.



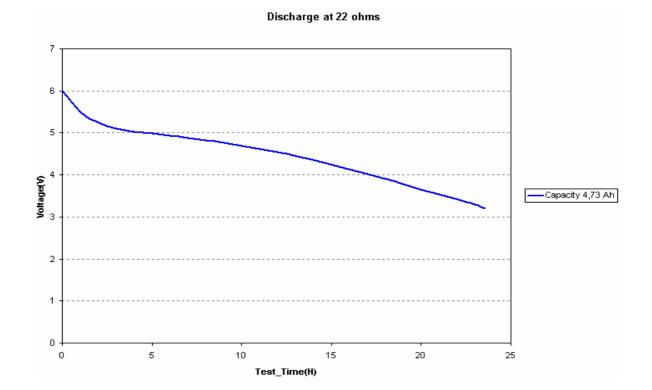

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.