



T 300

TUNG OIL

纯熟桐油

Natural Wood Oil for Outdoor and Indoor Waterproofing Protection

Uses

1. Sauna room benches, Guitar, concrete and stone floor, wood decking, boat, benches, furniture, table top, chopping board....etc.
2. Use as clear coat to protect metal parts against rust.

General

1. Pure Tung oil is a hard drying oil that provides a lustrous and beautiful clear finish.
2. Finishes has a deep, almost wet look.
3. After numerous coats the finish can even look plastic-like
4. It penetrates well, resists marring and is environmentally friendly.
5. It will penetrate deeply into the wood to enhance character and water resistance while creating a great wood finish.
6. All natural, food safe, and creates a flat finish.
7. Pure Tung oil wood finish for vintage-inspired and historic projects.
8. Apply as a topcoat over paint or simply apply to your woodwork and projects for a fantastic finish.
9. This also works very nicely on bare metal for an oil-rubbed look.

Advantages

1. Zero VOC's, All Natural, environmentally friendly.
2. Naturally polymerizing finish, cures by oxidation not evaporation.
3. Does not form a glossy finish no matter the number of coats, forms a flexible water

proof finish.

4. Resists abrasion and acids, does not blister and peel when applied correctly.
5. Tung oil resists water better, it does not support mold growth like linseed oil.
6. Natural oil to prevent Termite attack.
7. It does not darken noticeably with age, unlike linseed oil.

Application

Drying Time:	2 to 5 hours
Re-Coating Interval:	5 hours
Fully Cure:	6 hours

1. Best to apply on a dry day, above 8°C.
2. Moisture content in the wood should be below 20 %.
3. For best results, dilute Pure Tung Oil 50/50 with Turpentine or Citrus Solvent or Limonene and D-limonene, for high density surface.
4. Access YouTube for detailed application.

Coverage

10 m²/ 1 kg, 50 m² / 5 kg, 200 m² / 20 kg.

Technical Data

Colour: Dark Brown colour oil.
Viscosity: Honey like.
Shelf Life: Tightly cap can last for many years.

Packing

1 kg-bottle, 5 kg-carboy, 20 kg-jerry can, 200 kg-drum.

WARRIOR PTE LTD

Blk 17 Marsiling Industrial Estate Road 1 # 01-11 Singapore 739279

Tel: (65) 6364 5100

war99@singnet.com.sg

Fax: (65) 6364 0629

www.warrior.com.sg

bizSAFE₃



CERT NO.: XX-XXXX
ISO 14001: 2004



T 300 TUNG OIL 纯熟桐油


Natural Wood Oil for Outdoor and Indoor Waterproofing Protection



Wood grain is enhanced after oiling with cloth.

Safety

- Keep containers tightly sealed away from extreme temperature changes and open flames.
- All oils, rags, steel wool or waste soaked with oil, may spontaneously catch fire if improperly disposed.
- Immediately after use, place the oil soaked material in a sealed water-filled metal container or hang outside for it to dry before throwing into the bin.

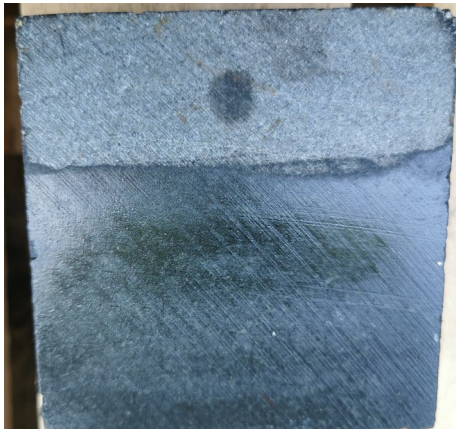

Impregnated 1 coat with cloth to achieve even color tone.



Truck Bed coated with T300 to resist rain damages and mold.



T300 coated to prevent mold growth.

Disclaimer: The information provided in this brochure is ensured to be as accurate as possible at the time of inclusion, however there may be inadvertent and occasional errors which may have slipped from our notice. Warrior Pte Ltd does not guarantee and make no representations or warranties of any kind about the information, advice and opinions provided and reserves the right to make changes and corrections at any time, without prior notice to any parties. Warrior Pte Ltd accepts no liability for any inaccuracies or omissions in its brochure and any decisions made based on information and opinions contained in the brochure is the sole responsibility of the user

WARRIOR PTE LTD

Blk 17 Marsiling Industrial Estate Road 1 # 01-11 Singapore 739279

Tel: (65) 6364 5100

war99@singnet.com.sg

Fax: (65) 6364 0629

www.warrior.com.sg

