

Benefits

- No external driver required which facilitates easy installation and maintenance
- Delivers uniform light distribution
- IP44 rated diffuser versions for damp locations such as bathrooms and kitchens

Application



Model	Item Description	W	PF	lm	lm/W	CRI	Beam	lm/ft²	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
F26000RC-WH	SIENA 3" R85 5W 4000K 90D WH	5	0.9	350	70	80	90°	25000	120*120*100	370*250*420	24
F26000RC-SV	SIENA 3" R85 5W 6500K 90D SV	5	0.9	350	70	80	90°	25000	120*120*100	370*250*420	24

Technical Specifications	
CRI	80
Colour Consistency (SDCM)	≤ 6
Dimmable	No
Housing Colour	White/Silver
IP	IP44
IK	IK02
Driver integrated (Yes/No)	Yes


Electrical Supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC

Mechanical Properties	
Optical Material	PP
Housing Material	PC

Application Conditions	
Operating Temperature	-20°C~40°C
Application Temperature	20°C
Storage Environment	-20°C~40°C

Photometric Data

F26000RC

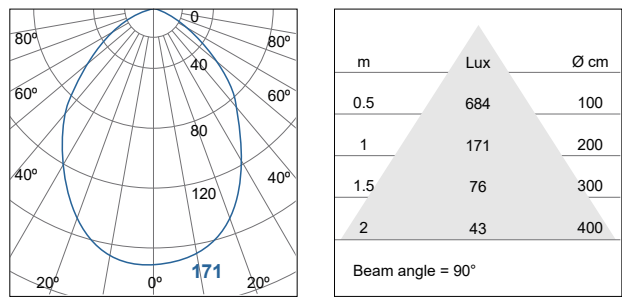

Dimensional Drawing

