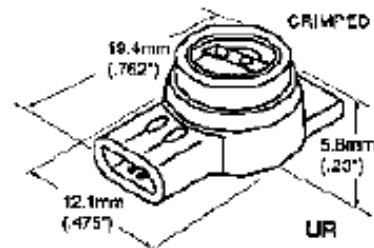
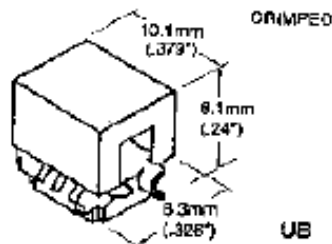
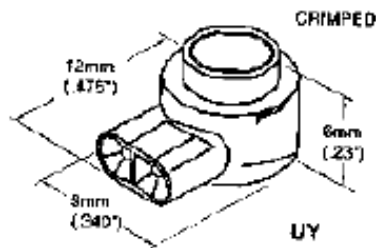








# Datasheet

## Telecom Splicing Conn, 2 Way Gel Filled

RS Stock number [510-4797](#)



CONNECTOR	TYPE CONNECTOR	Maximum Insulation O.D. metric (mm)    inch	CABLE TYPE						Q'TY BOX
			PIC-unfilled metric (mm)    A.W.G.		PIC-filled metric (mm)    A.W.G.		Pulp or Paper metric (mm)    A.W.G.		
		1.32    .050	.7-.4	22-26	.7-.4	22-20	.7-.4	22-26	
		1.27    .050	.7-.4	22-26	.5-.4	24-28	.7-.4	22-26	
		1.57    .060	.9-.4	19-20	.7-.4	22-26	.9-.4	19-20	

Note: Can be used on 22 AWG (1.0mm) Plenum Insulated Cable

Note: Can be used on 18 AWG (1.0mm) Plenum Insulated Cable