


FEATURES

- High quality
- Suitable for a multitude of uses
- Easy to thread
- Black and natural colours available in a range of sizes

RS PRO Natural Nylon Cable Tie, 190mm x 4.8 mm

RS Stock No.: 178-484

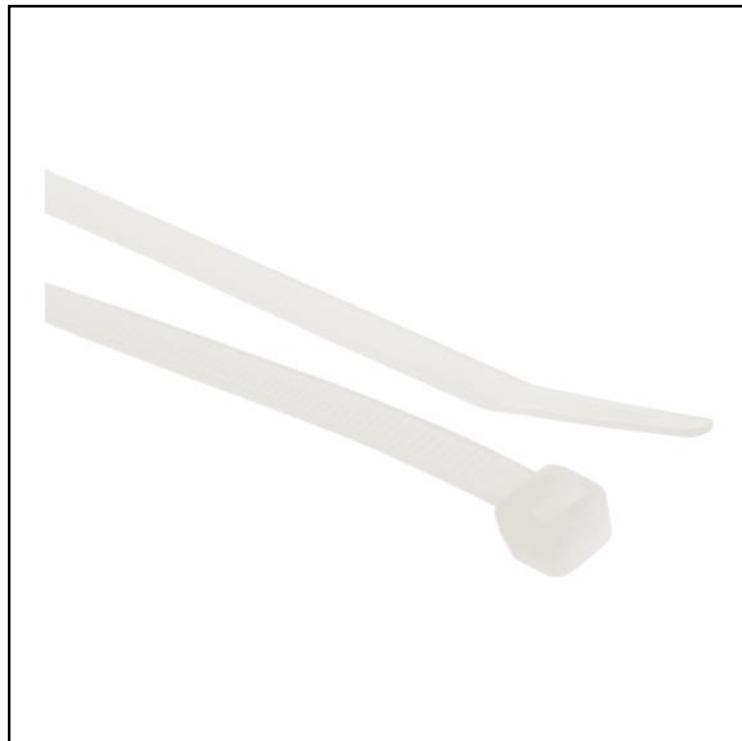

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Nylon Non-Releaseable Cable Ties. Their primary purpose is to aid clean installations by holding cables together or in a specific location. They however have various other uses such as hanging or storing parts ready to paint. RS PRO Nylon Non-Releaseable Cable Ties are made from nylon, easy to use and are an essential item for any toolbox.

General Specifications

| | |
|-------------------------------|---|
| Type | Non-Releaseable |
| Colour | Natural |
| Material | Nylon 66 |
| Application | Suitable for use in electrical and electronic servicing, maintenance, mechanical and automotive applications. |
| Minimum Operating Temperature | -40°C |
| Maximum Operating Temperature | 85°C |
| Fire Behaviour | Flame Retardant |
| Quantity | 100 |


Mechanical Specifications

| | |
|-------------------------|--------|
| Length | 190mm |
| Width | 4.8mm |
| Tensile Strength | 215.6N |
| Maximum Bundle Strength | 49mm |

Approvals

| | |
|---------------|---------|
| Standards Met | UL94V-2 |
|---------------|---------|

Cable Ties

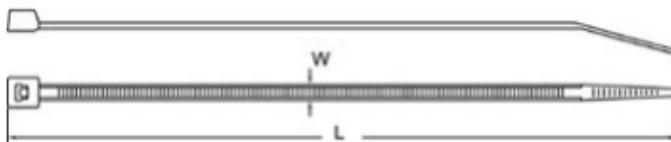**Dimensions**

| RS Article | Colour | Length (mm) | Width (mm) | Quantity | Min. Tensile Strength (Kg) | Max Bundle Dia. (mm) |
|------------|---------|-------------|------------|----------|----------------------------|----------------------|
| 178-462 | Natural | 100 | 2.5 | 100 | 8 | 22 |
| 233-499 | Black | 100 | 2.5 | 100 | 8 | 22 |
| 492-0447 | Natural | 100 | 2.5 | 1000 | 8 | 22 |
| 233-455 | Black | 100 | 2.5 | 1000 | 8 | 22 |
| 178-478 | Natural | 150 | 3.6 | 100 | 18 | 36 |
| 233-465 | Black | 150 | 3.6 | 100 | 18 | 36 |
| 492-0453 | Natural | 150 | 3.6 | 1000 | 18 | 36 |
| 233-500 | Black | 150 | 3.6 | 1000 | 18 | 36 |
| 178-484 | Natural | 190 | 4.8 | 100 | 22 | 49 |
| 233-461 | Black | 190 | 4.8 | 100 | 22 | 49 |
| 492-0469 | Natural | 190 | 4.8 | 1000 | 22 | 49 |
| 233-506 | Black | 190 | 4.8 | 1000 | 22 | 49 |

| RS Article | Colour | Length (mm) | Width (mm) | Quantity | Min. Tensile Strength (Kg) | Max Bundle Dia. (mm) |
|------------|---------|-------------|------------|----------|----------------------------|----------------------|
| 489-2140 | Natural | 203 | 4.6 | 100 | 22 | 52 |
| 233-471 | Black | 203 | 4.6 | 100 | 22 | 52 |
| 178-490 | Natural | 292 | 3.6 | 100 | 18 | 82 |
| 233-477 | Black | 292 | 3.6 | 100 | 18 | 82 |
| 489-2156 | Natural | 300 | 4.8 | 100 | 22 | 83 |
| 233-487 | Black | 300 | 4.8 | 100 | 22 | 83 |
| 178-507 | Natural | 368 | 4.8 | 100 | 22 | 105 |
| 233-483 | Black | 368 | 4.8 | 100 | 22 | 105 |
| 233-493 | Black | 380 | 7.6 | 100 | 55 | 105 |

