


Datasheet

PET, Rubber Vee Friction Belt, belt section Z

RS Stock number 471-843

Z Section Classical Wrapped Vee Belts

to API 1B, RMA IP 20, DIN 2215, ISO 4184 & BS3790

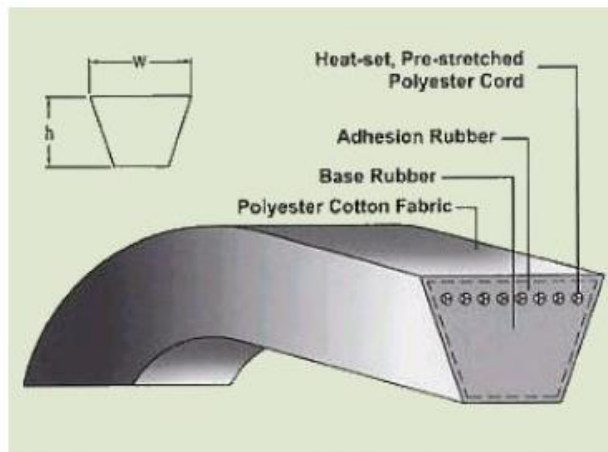

Dimensions
w x h (mm)
10 x 6

Min. Pulley
Diam. PCD
(mm)
50

Std. Belt
Lengths
(mm)
400 - 1670

Description:

RS Z, A & B Section Belts

Special compounded stiff-yet-flex-crack resistant base

High modulus low stretch (hmls) polyester cords and length stabilisation process resulting in low stretch and maximum life

Polychloroprene impregnated poly-cotton jacket

Precision built belts requiring no matching or coding

Anti-static, heat, oil and abrasion resistant

Standards: API 1B, RMA IP 20, DIN 2215, ISO 4184 & BS3790



Z Section - 10mm x 6mm - Wrapped Construction

| Inside Length Li (ins) | Inside Length Li (mm) | Inside Length Li (ins) | Inside Length Li (mm) | Inside Length Li (ins) | Inside Length Li (mm) | Inside Length Li (ins) | Inside Length Li (mm) |
|---------------------------|--------------------------|---------------------------|--------------------------|---------------------------|--------------------------|---------------------------|--------------------------|
| Z9.5 | 240 | Z26 | 660 | Z41.5 | 1050 | Z56 | 1422 |
| Z10.5 | 265 | Z26.5 | 670 | Z42 | 1060 | Z56.5 | 1435 |
| Z11 | 280 | Z27 | 685 | Z42.25 | 1075 | Z57 | 1450 |
| Z11.5 | 290 | Z27.5 | 700 | Z42.5 | 1080 | Z57.5 | 1460 |
| Z12.5 | 315 | Z28 | 710 | Z43 | 1090 | Z58 | 1475 |
| Z13.5 | 340 | Z28.5 | 725 | Z43.25 | 1100 | Z59 | 1500 |
| Z14 | 355 | Z29 | 730 | Z43.5 | 1105 | Z60 | 1525 |
| Z14.5 | 370 | Z29.5 | 750 | Z44 | 1120 | Z61 | 1550 |
| Z15 | 380 | Z30 | 765 | Z44.5 | 1130 | Z62 | 1575 |
| Z15.5 | 395 | Z30.5 | 775 | Z45 | 1140 | Z63 | 1600 |
| Z16 | 405 | Z31 | 790 | Z45.5 | 1150 | Z64 | 1625 |
| Z16.5 | 420 | Z31.5 | 800 | Z46 | 1165 | Z65 | 1650 |
| Z17 | 430 | Z32 | 820 | Z46.5 | 1180 | Z66 | 1675 |
| Z17.5 | 445 | Z32.5 | 825 | Z47 | 1194 | Z67 | 1700 |
| Z18 | 460 | Z33 | 840 | Z47.5 | 1215 | Z68 | 1725 |
| Z18.5 | 470 | Z33.5 | 850 | Z48 | 1225 | Z69 | 1750 |
| Z19 | 48 | Z34 | 865 | Z48.5 | 1230 | Z70 | 1775 |
| Z19.5 | 500 | Z34.5 | 875 | Z49 | 1250 | Z71 | 1800 |
| Z19.75 | 510 | Z35 | 890 | Z49.5 | 1260 | Z72 | 1830 |
| Z20 | 515 | Z35.5 | 900 | Z50 | 1270 | Z73 | 1850 |
| Z20.5 | 525 | Z36 | 915 | Z50.5 | 1280 | Z74 | 1880 |
| Z21 | 530 | Z36.5 | 925 | Z51 | 1295 | Z75 | 1900 |
| Z21.5 | 550 | Z37 | 940 | Z51.5 | 1310 | Z78 | 1975 |
| Z22 | 560 | Z37.5 | 950 | Z52 | 1320 | Z79 | 2000 |
| Z22.5 | 575 | Z38 | 965 | Z52.5 | 1330 | Z82 | 2083 |
| Z23 | 585 | Z38.5 | 975 | Z53 | 1346 | Z83.5 | 2120 |
| Z23.5 | 600 | Z39 | 990 | Z53.5 | 1360 | Z88 | 2240 |
| Z24 | 610 | Z39.5 | 1000 | Z54 | 1371 | Z90.5 | 2300 |
| Z24.5 | 620 | Z40 | 1016 | Z54.5 | 1385 | Z93 | 2360 |
| Z25 | 630 | Z40.5 | 1030 | Z55 | 1400 | Z98 | 2500 |
| Z25.5 | 650 | Z41 | 1041 | Z55.5 | 1410 | | |