


- Customization
- 01 series
- 03S series**
- 05S series
- 07S series
- 08 series
- 09C series
- 10 series
- 11 series
- 12 series
- 13 series
- 17 series
- 20 series
- 21 series
- 23 series
- 24 series
- 27 series
- 28 series
- 30 series
- 35 series
- 43 series
- F02 series
- L01 series

03S 30-160



PP

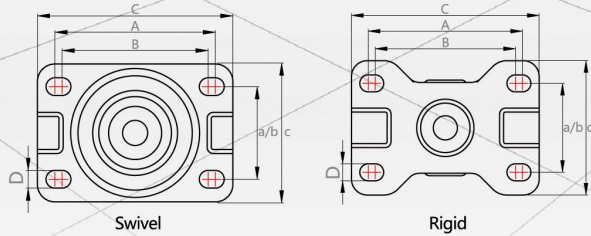

Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

* Remark: Please refer to the standard of Zhongshan caster industry association.

Wheel: Polypropylene (PP), wear-proof, impact resistance.
Wheel surface hardness: 65-70°Shore D.
Wheel core structure: Polypropylene (PP).
Bearing: SUPO customization single ball bearing with plastic dust-proof cover.
 For more information please refer to page 283.

Swivel Top Plate	Wheel Material	NO. Model	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	Plate size (mm)	Hole Spacing (mm)	Hole size (mm)
	(PP)	Z03S-01-75-111	75(3")	32	110	106	74.5	117		(C)95x67	(A)78x45 (B)71x45	(D)8.5
		Z03S-01D-75-111										
		Z03S-01C-75-111										
		Z03S-04-75-111										
		Z03S-01-100-111	100(4")		135	130	88	121				
		Z03S-01D-100-111										
		Z03S-01C-100-111										
		Z03S-04-100-111										
		Z03S-01-125-111	125(5")		152	155	101.5	126				
		Z03S-01D-125-111										
		Z03S-01C-125-111										
		Z03S-04-125-111										

Others (MOQ)

Top plate with total lock brake (Metal)	Swivel(Hollow Rivet)	Swivel(Hollow Rivet) with Total lock brake(Metal)	Swivel(Hollow Rivet) with Total lock brake(Plastic)	Swivel(Hollow Rivet) with side lock brake(Metal)
Z03S-01A-63-111 Z03S-01A-75-111 Z03S-01A-100-111 Z03S-01A-125-111	Z03S-03-63-111 Z03S-03-75-111 Z03S-03-100-111 Z03S-03-125-111	Z03S-03A-63-111 Z03S-03A-75-111 Z03S-03A-100-111 Z03S-03A-125-111	Z03S-03D-63-111 Z03S-03D-75-111 Z03S-03D-100-111 Z03S-03D-125-111	Z03S-03C-63-111 Z03S-03C-75-111 Z03S-03C-100-111 Z03S-03C-125-111