
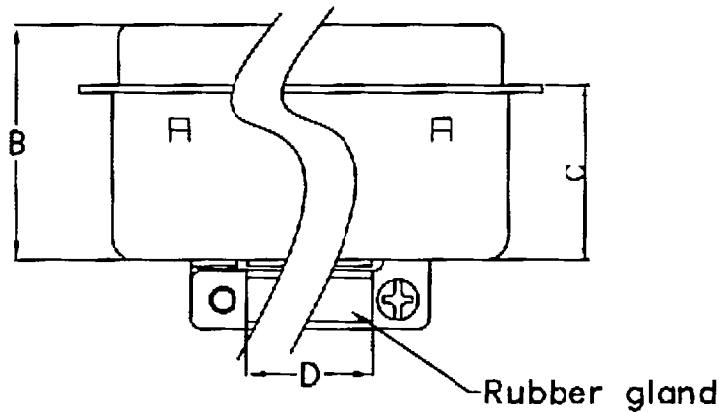


REVISIONS			
DATE	LTR	DESCRIPTION	APVD

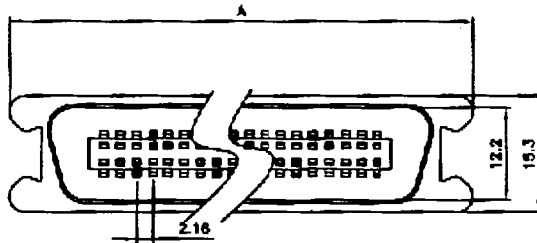

No of Pins	PART NO.	ITEM NO
14	239-1190	G571403S
24	239-1207	G572403S
36	239-1213	G573603S
50	239-1229	G575003S

Insulator:PBT UL94V-0  
 Shell:Steel,Nickel over Copper Plated  
 Contacts:Brass Alloy Gold Plated on contact  
 Tin plated on terminal

HOOD:Steel  
 Rating current: 1 AMP

Contact resistance: <25m Ohm  
 Insulation resistance: >1000M ohm at 500V  
 Operating Temp: -55°C to +105°C

POSITION	A	B	C	D
14F	37.8	41.0	21.4	7.6
24F	48.6	41.4	21.0	11.3
36F	61.6	42.4	23.0	16.8
50F	76.7	45.0	25.4	19



UNLESS OTHERWISE SPECIFIED TOLERANCE : X, ±0.2    ANGLE : ±2° X.X ±0.1 X.XX ±0.05    DO NOT SCALE DRAWING		TITLE <b>Centronic Solder type Male</b>	
DRAWN BY <i>Arhua</i>	SIZE A	UNIT mm	PART NO. 239-1XXX
CHECKED BY <i>Am J 10</i>	SCALE 1 : 1	THIRD ANGLE PROJECTION 	PAGE 1 OF 1
APPROVED BY <i>Am J 10</i>	DWG NO. DEWX2001061901X0	ITEM NO. G57XX03S	DATE 08/16/2001