

LED LINEAR MODULE



LM SERIES



Applications

Retrofitting for fluorescent lightings

Mounting Methods

Mounting Clips or Mounting Plate

Materials

Diffuser cover: Polycarbonate

Base plate: Aluminium

Key Features


- Triac dimming compatible
- Build-in high thermal efficient heat sink that allows the LED linear module to operate at ambient temperature of up to 55°C
- Special design polycarbonate diffuser to optimize the LED light transmission
- Long service life of 100,000 hours @ 50°C (Ta)
- Safety, EMC and IEC compliance



Mounting Clips




Mounting Plate

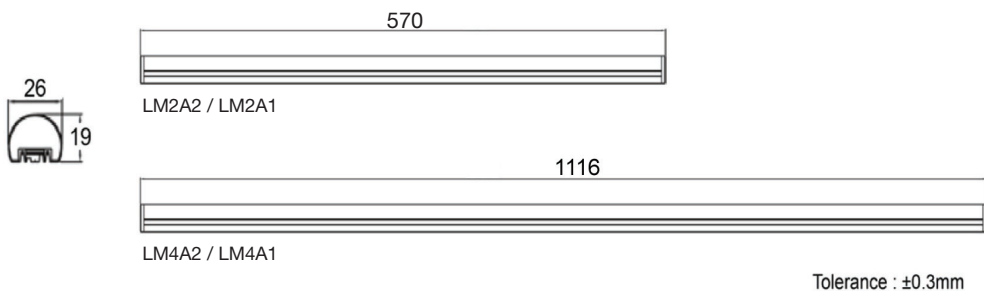


TECHNICAL SPECIFICATIONS

IP 20



Ideal Replacement:



BH Code	Type	Main Voltage	Power	CCT	Ambient Temp (Ta)	System Lumen
LALM25A2	LM2A2	220V - 240V AC	12.5W	5000K	-40°C ~ +55°C	1000lm
LALM23A2	LM2A2	220V - 240V AC	12.5W	3000K	-40°C ~ +55°C	1000lm
LALM25A1	LM2A1	100V - 120V AC	12.5W	5000K	-40°C ~ +55°C	1000lm
LALM23A1	LM2A1	100V - 120V AC	12.5W	3000K	-40°C ~ +55°C	1000lm
LALM45A2	LM4A2	220V - 240V AC	24W	5000K	-40°C ~ +55°C	2100lm
LALM43A2	LM4A2	220V - 240V AC	24W	3000K	-40°C ~ +55°C	2100lm
LALM45A1	LM4A1	100V - 120V AC	24W	5000K	-40°C ~ +55°C	2100lm
LALM43A1	LM4A1	100V - 120V AC	24W	3000K	-40°C ~ +55°C	2100lm

