### XVGB3SW

# Tower Light - RAG - 24V - LED - W.Buzzer - Base mounting





#### Main

Range of product	Harmony XVG	
Product or component type	Complete pre-wired monolithic tower light	
Beacon or indicator bank unit type	3 illuminated units	
Material	PC (UL94 V-2): globe ABS (UL94HB): tube body Aluminium: tube	
Mounting diameter	60 mm	
Component name	XVG	
Device mounting	Base mounting	
Light source	LED steady red LED steady green LED steady amber	
Light block color	Red/orange/green	
Indicator bank base type	Base with integrated buzzer	

#### Complementary

Rated supply voltage	24 V AC/DC
Cable cross section	0.33 mm <sup>2</sup>
Discrete output type	PNP and NPN
[Uimp] rated impulse withstand voltage	0.5 kV
Current consumption	180 mA
Noise level	85 dB
Power consumption in W	4.1 W
Fundamental frequency	2.64 kHz
Net weight	0.25 kg

#### Environment

Product certifications	CE[RETURN]EAC
Ambient air temperature for storage	-3570 °C
Ambient air temperature for operation	-1050 °C
IP degree of protection	IP42

#### **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.926 cm
Package 1 Width	8.002 cm
Package 1 Length	31.039 cm
Package 1 Weight	350.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	21
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm

Package 2 Weight	8.591 kg
Unit Type of Package 3	P06
Number of Units in Package 3	84
Package 3 Height	75 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	43 kg


### Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	☑ REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	☑ China RoHS Declaration
RoHS exemption information	₫Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	☑ End Of Life Information

#### Contractual warranty

Warranty	18	months


#### **Dimensions**

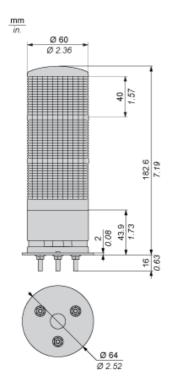


# Product data sheet Mounting and Clearance

## XVGB3SW

#### Mounting



#### Wiring



- (1) "ON" for lighting and/or applying continuous sound.(2) Fuse (rated current: 0.5 A)
- RD: Red YE: Yellow GR : Green GY : Grey OR : Orange BK: Black