



Datasheet


RS PRO Enclosure Heater

Stock No: 226-3688


1000watts 230volts

High quality heavy duty power resistor enclosures (IP20) manufactured from Zinc plated steel and having a powder coated finish. vitreous enamelled resistor.

Rated at 1000 watts continuous. Standard voltages 110/230V. Available to order in 12V - 300V (AC/DC Supply).

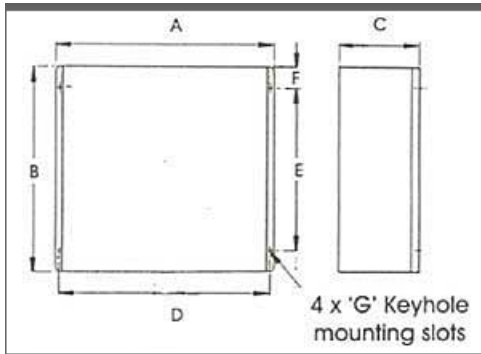

A	B	C	D	E	F	G
182	430	153	168	335	38	4

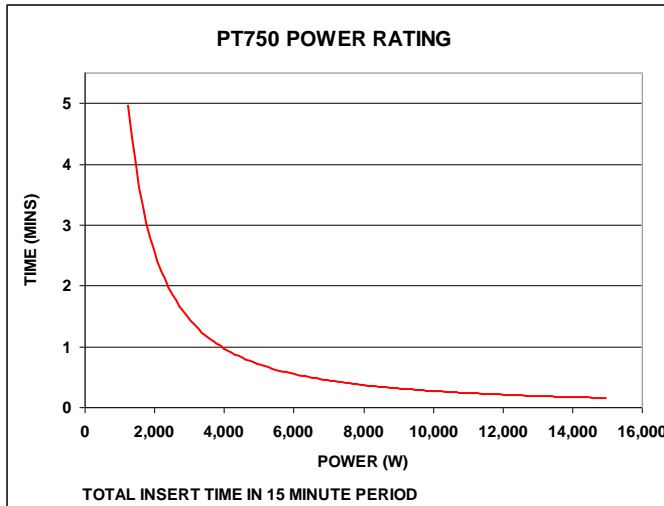

Short time overload	Refer to graph. Note that performance at intervals less than 10 seconds are dependent upon resistance value. Assuming a cooling time of at least 20 minutes between duty cycles.
Load life	Tested for 500 cycles for minimum 1,000 hours
Load life in humidity	Tested for 500 cycles for minimum 1,000 hours at 40°C ambient, 90-95% humidity
Temperature cycling/ thermal shock	Tested from -55°C ambient under full power for 30 mins and from 155°C ambient under full power for 30 mins. 5 cycles.
Corrosion	Tested for 240 hours at 40°C ambient and 90-95% humidity. All fasteners & bracketry zinc plated.
Dielectric withstand voltage	2kV terminal to ground (greater on request). Maximum across resistor 4.4 kV
Temperature coefficient	Maximum 50ppm/°C

RoHS
compliant

