

FEATURES

- A manual depaneling tool designed to separate PCBs in a quick, economic and safe way, obtaining well-finished cut surfaces; the maximum length of the isthmus (tab) should not exceed 3mm.
- Blade thickness 1.8mm (0.070")
- Maximum PCB thickness 1.6mm
- Minimum isthmus distance 11mm
- maximum cutting force 3 kg
- Ergonomic anti-slip bi-component handle for a safe, light and comfortable grip
- Anti-reflection phosphating surface treatment
- Laser marking
- Made in Italy

RS PRO PCB separator pliers (blade thickness 1.8mm-0.070")

RSPRO Stock No.: 238-0732



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

- *Made in Italy with special carbon steel and undergo a controlled atmosphere heat treatment.*
- *The anti-reflection phosphating surface treatment ensures an accurate view of the work being carried out.*
- *The tools are joined with grounded holes and surfaces, thereby allowing precise movements.*
- *The anti-slip bi-material dolphin handle is created following ergonomic principles, thus guaranteeing a safe, light and comfortable grip for the operator even when used constantly for many hours*
- *A manual depaneling tool designed to separate PCBs in a quick, economic and safe way, obtaining well-finished cut surfaces; the maximum length of the isthmus (tab) should not exceed 3 mm.*
- *Blade thickness 1.8mm (0.070")*
- *Maximum PCB thickness 1.6mm*
- *Minimum isthmus distance 11mm*
- *Maximum cutting force 3 kg*

General Specifications


| | |
|-------------------------|---|
| Blade Thickness | 1.8mm – 0.070" |
| Non-Sparking | Yes |
| Material | Carbon Steel |
| Number Of Pieces | 1 |
| Finish | Anti-reflection phosphating surface treatment, red grip |

Electrical Specifications

| | |
|-----------------|----|
| ESD Safe | no |
|-----------------|----|

Mechanical Specifications

| | |
|------------------------|-------|
| Overall Length | 147mm |
| Weight | 100g |
| Steel Thickness | 3mm |

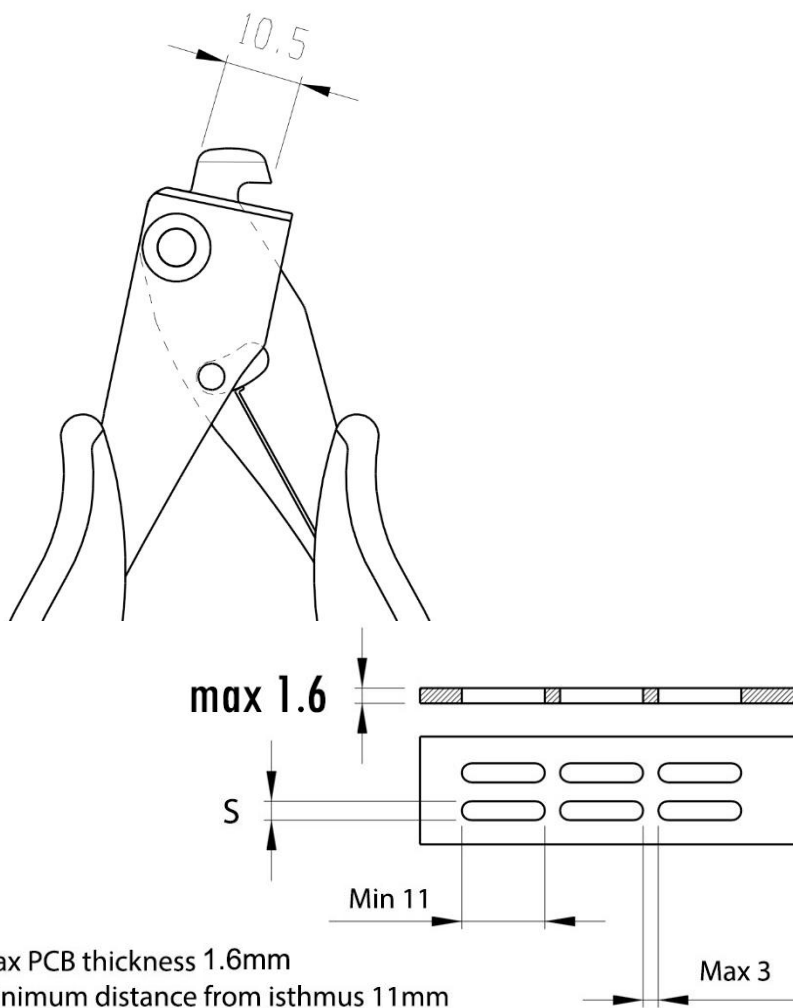

Max PCB thickness 1.6mm
Minimum distance from isthmus 11mm
Max length isthmus 3mm