



Datasheet

ENGLISH



162-3011

# RS PRO AHD IR BULLET CAMERA(1080P)



## Feature

- 1/2.9", 2.12Mp Sony Exmor Sensor
- 1080P AHD Video Output
- AHD Transmission Max.300M (3C-2V)
- Color : 0.08Lux, B/W : 0.008Lux
- 3D-DNR, D-WDR, Sens-up
- Mega f=5~50mm DC IRIS ICR Lens
- 30IR + 3Super IR LEDs, IR Range Max. 70m
- Built-in OSD Key
- Power requirement : DC12V (±30%),  
Power source is not included
- IP 67, Weatheproof

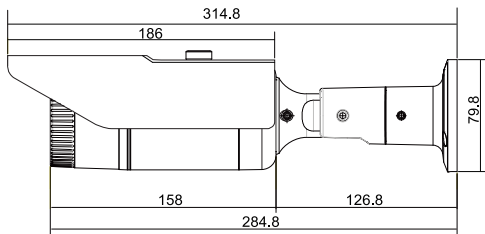

Specifications		NTSC / PAL		
Image Device		1/2.9", 2.12 Megapixel Sony Exmor CMOS		
Total Pixels / Active Pixels		2001(H) x 1121(V) / 1936(H) x 1097(V)		
Scanning System		Progressive		
Resolution		AHD2.0 (1080P) _1100TVL, CVBS(1280H) _1000TVL		
S/N		More than 52dB(AGC Off)		
Video Output		AHD(To Right@key OSD) / CVBS(To Left@key OSD) NTSC / PAL - Selectable in OSD MENU VIDEO OUT(AHD & CVBS)		
Lens		Mega f=5~50mm DC IRIS ICR Lens		
IR LEDs		30 IR + 3 Super IR LEDs, IR Range Max. 70m		
Min. Illumination		COLOR : 0.08Lux / BW : 0.008Lux Color Sens-up :0.008Lux / BW Sens-up :0.0008Lux		
OSD Functions	White Balance	ATW/ AWC-SET / INDOOR / OUTDOOR / MANUAL / AWB		
	Exposure	DC / MANUAL		
	Shutter Speed	AHD	AUTO / FLK	
		CVBS	NTSC :1/30 ~1/50.000sec / PAL :1/25 ~1/50.000sec	
	SENS-UP	AUTO(x6) / x2,x4,x6,x8,x10,x15,x20,x25,x30		
	Backlight Compensation	OFF/BLC / HSBLC		
	Privacy Masking	4 Zone		
	Day & Night	AUTO / COLOR / BW / EXT		
	Motion Detection	OFF / ON		
	2DNR	AHD	OFF / LOW / MIDDLE / HIGH	
		CVBS		
	3DNR			
	Digital Effect	OFF / MIRROR / V-FLIP / ROTATE & FREEZE		
	Sharpness / DEFOG	Adjustable / ON / OFF		
	Image Enhancement	D-WDR		
LANGUAGE	ENG/GER/FRA/ITA/SPA/POL/RUS/POR/NED/ TUR/KOR/JPN/HEB/ARB			
Power Input / Consumption		DC12V ± 30%, 120mA(IR Off), 240mA(IR On)		
Operation/Storage Temp.		-10°C - +50°C / -20°C - +60°C		
Dimension (mm)		Φ77 × 284.8 (mm)		
Cable		Standard 500mm BNC/DC Jack		