

Datasheet


Stock No: 179-2917, 179-2918

Analogue Dial Multifunction Timer




Specifications:

- 8 pin plug-in
- Analogue Dial Display
- Multi-function timer

RS Stock No		179-2917	179-2918
Specification			
Supply Voltage		100-240Vac 100-125Vdc	24-48Vac 12-48Vdc
Operating Voltage Range		85~110% rated supply voltage	
Display type		Analogue Dial Display	
Timing Function		A: ON-delay, B2: Flicker ON start, E: Interval, J: One-shot	
Timing Range		0.1s – 300h	
Contact	Configuration	2PDT (2C)	
	Rated Current AC-1	5A @ 250VAC (p.f. =1)	
Repetitive Error		±0.3% (FS max.), (±0.3% 10ms max. in range of 1.2s)	
Setting Error		±5% (FS max.) ±5ms	
Voltage Error		±0.5% (FS max.) (±0.5% ±10ms max. in a range of 1.2s)	
Temperature Error		±2% (FS max.) (±2%±10ms max. in a range of 1.2s)	
Resetting Time		0.1sec	
Insulation resistance		100MW (DC500V)	
Vibration Resisance	Destruction	10~55Hz with 0.75mm single amplitude each in 3directions for 2 hours each	
	Malfunction	10~55Hz with 0.5mm single amplitude each in 3 directions for 10 minutes each	
Shock Resistance	Destruction	30G	
	Malfunction	10G	
Life Expectancy	Electrical Life	> 10 ⁷	
	Mechanical Life	> 10 ⁵ (AC 250V, 5A)	
Mounting		8 Plug-in, Panel Mount	
Unit Weight		Approx.95g	
Certification			

Mounting Dimensions (mm)

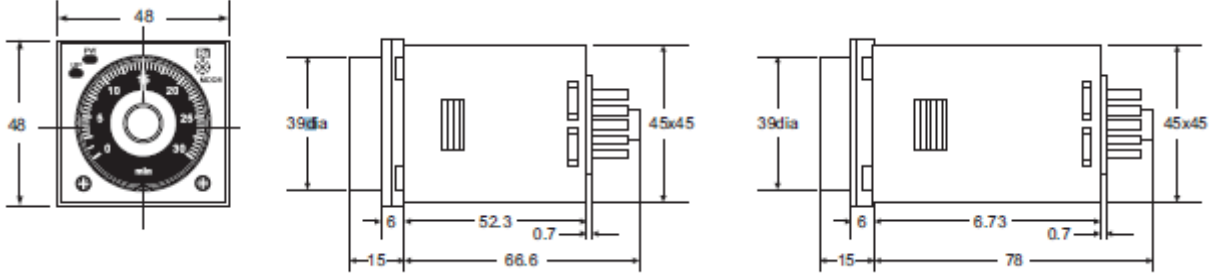

Connection Diagram

