

## Datasheet

# RS PRO UL1061 Green, 0.33 mm<sup>2</sup> Hook Up Wire, 30.5m

Stock No: 1680786



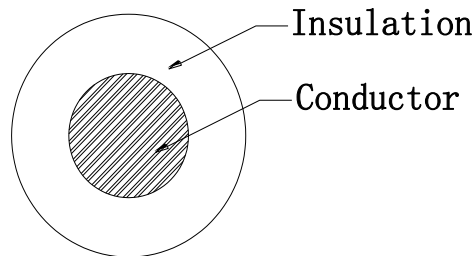
## Technical Specifications:



Conductor	Tinned Copper
Cores Number	1C
Size(AWG)	22AWG
Construction( $\pm 0.008$ mm)	7/0.25
Stranded Dia.(mm)	0.76
Insulation Material	SR-PVC
Insulation Color	Green (RAL6026)
Ave Thickness(mm)	0.25
Min Thickness(mm)	0.18
Insulation Dia.( $\pm 0.10$ mm)	1.27

## Features & Benefits:

- **Temperature Range: -10 to 80 °C**
- **Conductor resistance(20°C Ω/km): 59.4Max.**
- **Insulation DC Resistance(20°C MΩ\*Km): 200Min.**
- **Rated Voltage: 300V**

## Cross Section drawings



**Cable Marking:** E254881  AWM STYLE 1061 22AWG  
80°C 300V VW-1 C  AWM I A 80°C 300V FT1 -LF- -F-  
ELETECK

**Applications:** Hook up wire can be used for a broad range of applications, whether that be in a control cabinet, high-temperature oven, or in a specialised machine tool.