
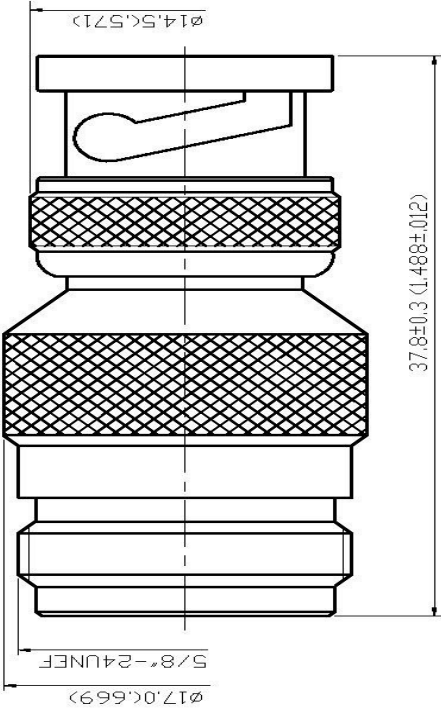


Datasheet
Stock No:1707019
RS Pro
BNC STRAIGHT PLUG-N JACK ADAPTER

NO	DESCRIPTION	DATE
△	13-43-3/R13-043-03-002620AE → 4011101300002	02.02.18





1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-6 GHz
 1.2 NOMINAL IMPEDANCE: 75 OHMS
 1.3 VOLTAGE RATING: 500 VOLTS MAX.
 1.4 ISWR: 1:2 MAX.

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS-C3604
 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B186 UNS C17800
 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-346B

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

NO	DESCRIPTION	MATERIAL	QTY	FINISH
9	SHALL	BRASS	1	NICKEL 100µ MIN.
8	GASKET	SILICONE	1	RED
7	WASHER	BRASS	1	NICKEL
6	SPRING WASHER	SK-5	1	NICKEL
5	WASHER	BRASS	1	NICKEL
4	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 3µ MIN.
3	INSULATION	TEFLON	1	NONE
2	BODY	BRASS	1	NICKEL 100µ MIN.
1	CHASSIS	BRASS	1	NICKEL 100µ MIN.

APPROVED by _____ DATE: _____

DRAWN	TOLERANCE	品名	DATE	REV.
Jackie	±0.2	4011101300002/△	04.29.16	A-1
CHECK	XX ±0.1	TITLE	ROHS COMPLIANT (750)	
A7c	XXX ±0.05	單位	DWG. NO. 13-0692-Z	
APPROVAL	XXX ±0.05	比例	SCALE	
Jenny	ANGLE ±5°	例	4:1	