




ENGLISH

Datasheet

Stock No: 815-701

RS Pro Double Level Terminal Block, RKD Series

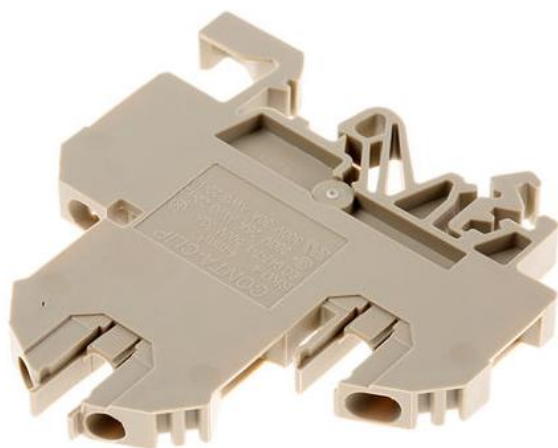

Approvals

UL, CSA

RS DIN Rail Terminals 2

Approvals

UL, CSA

Product Details

Double-Deck

These double-level terminal blocks are ideal for use in applications requiring high density wiring. Interconnection / shorting is possible at both levels. It is suited for 800 V applications and can accommodate larger K6 marking tags.

**ENGLISH**

Specifications:

Series	RKD
Wire Size	22 → 12 AWG
Cable CSA	0.5 → 4mm ²
Colour	Brown
Current Rating	32A
Number of Levels	Double
Termination Method	Screw Down
Voltage Rating	500 V
Minimum Operating Temperature	-40°C
Maximum Operating Temperature	+105°C

Accessories for RS	815701	
	RS Part No	Description
End Cover	815717	End Plate for 4mm Double Deck Terminal
Pre Assembly Bar	815789	4mm 10 Way Cross Connectors 20Amps
Markers	501623	6mm wide blanks for 6mm + terminals
	501629	6mm wide numbered 1-50 markers
	501679	6mm numbered 51-100 markers

Suitable terminals for RS	815789	
	RS Part No	Description
	815701	4mm Double Deck Terminal
	501998	Double deck terminal 4mm, int connect
	501825	Miniature terminal, 15mm symmetric rail
	815638	1.5-4mm Terminal Beige (Small Top)
	815644	1.5-4mm Terminal Blue (Small Top)