

#### **FEATURES**

- Dust poof and watertight,
  IP67 rated
- 360 degree shielding
- Full metal shield between pairs of wires
- Insulation Resistance >= 100 MΩ
- Brass nickel plated coupling nut
- Data Transmit Rate upto 10 Gbit/s

# RS PRO M12 MALE STRAIGHT X-CODED TO MALE RJ45 8 PIN 8 WIRE SHIELDED 1m TEAL PUR CAT6A CABLE

RS Stock No.: 2067668



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

### RS PRO M12 MALE TO RJ45 CONNECTOR



# Product Description ATTRIBUTE 1

RS PRO Patch Cords, M12 Series, 8 Way, X Coded

From RS PRO, these M12 patch cables are ideal for ethernet applications. The X-coded CAT.6A cable assemblies can transmit data rates of up to 10 Gbit/s, and with a M12 circular Moulded connector, they resistant to vibration and ideal for industrial environments.

Offered in M12 to M12 and M12 to RJ45 versions in a variety of lengths, the M12 X-coded of 8 way can be used for many applications, such as security and video surveillance systems, production and manufacturing, renewable energy or use with railway vehicles data systems.

#### Features and Benefits:

- Dust poof and watertight, IP67 rated
- Brass nickel plated coupling nut
- 360 degree shielding
- Insulation Resistance >= 100  $M\Omega$
- Full metal shield between pairs of wires

#### **General Specifications**

Rated Operational Voltage	50 V AC / 60 V DC
Current Rating	0.5A
Insulation Resistance	>= 100 MΩ
Temperature Range	-25°C +75°C
Coding	X-Coded

#### **Material Specifications**

	M12	RJ45
Grip Material	PU	PVC
Contact	Cu-Zn	Phosphor Bronze
Contact Plating	Gold Flash	Gold Flash
Contact Carrier	Nylon 66	Polycarbonate
Grip Color	Black	Black
Coupling Nut	Brass Nickel-Plated	
X-shell	Zinc Alloy	

## RS PRO M12 MALE TO RJ45 CONNECTOR



### **Cable Specifications**

Cable Length-L	1 m
Cable Type	Cat6A (4 x 2 Twisted Pair) PUR Shielded
Sheath Color	Teal
Cross Section of Wire	AWG 26/7
Cable Dia	6.8 ± 0.1 mm
Termination	RJ45
Transfer Parameters	CAT6A
Transfer Rate	10 Gbit/s

#### **Protection Category**

Degree of Protection	IP67 (M12) – IP20 (RJ45)
260.66 0.1.0660000	11 07 (14112) 11 20 (1043)

### **Additional Information**

Custom Tariff Number 85	5369090
-------------------------	---------

### **Approvals**


Standards Met	IEC 61076-2-109 (M12)
Otarida do mot	120 0207 0 2 200 (22)

### **Similar Products**

Stock No.	Brand	Product Name	Attribute 1	Attribute 2
xxx-xxxx	RS PRO	RS PRO M12 Male Straight X-Coded to Male RJ45 8 Pin 8 Wire Shielded 5m Teal PUR CAT6A Cable	M12 X-Coded Ethernet Cable Connector	M12 X-Coded 8 pin Ethernet Connector with CAT6A Cable
xxx-xxxx	RS PRO	RS PRO M12 Male Straight X-Coded to Male RJ45 8 Pin 8 Wire Shielded 10m Teal PUR CAT6A Cable	M12 X-Coded Ethernet Cable Connector	M12 X-Coded 8 pin Ethernet Connector with CAT6A Cable



## Connection Diagrams / Assembly Diagrams / Illustrations / Accessories

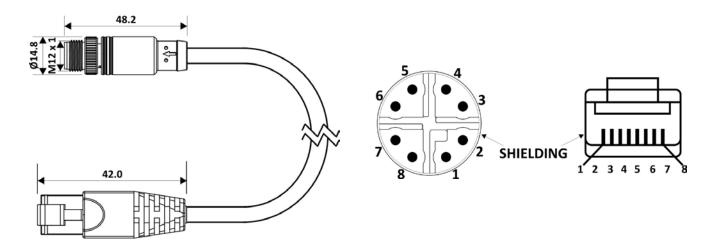

All Dimensions are in mm.

## **Wiring Diagram**

