


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005	Effective:	12/21/98	Doc No.	880
DOP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD
	A	Redrawn in autocad	JAP	11/28/91			
1199	B	Renamed was CSS-TO-****-HT	JWM	1/7/02	JC	3/1/02	JC

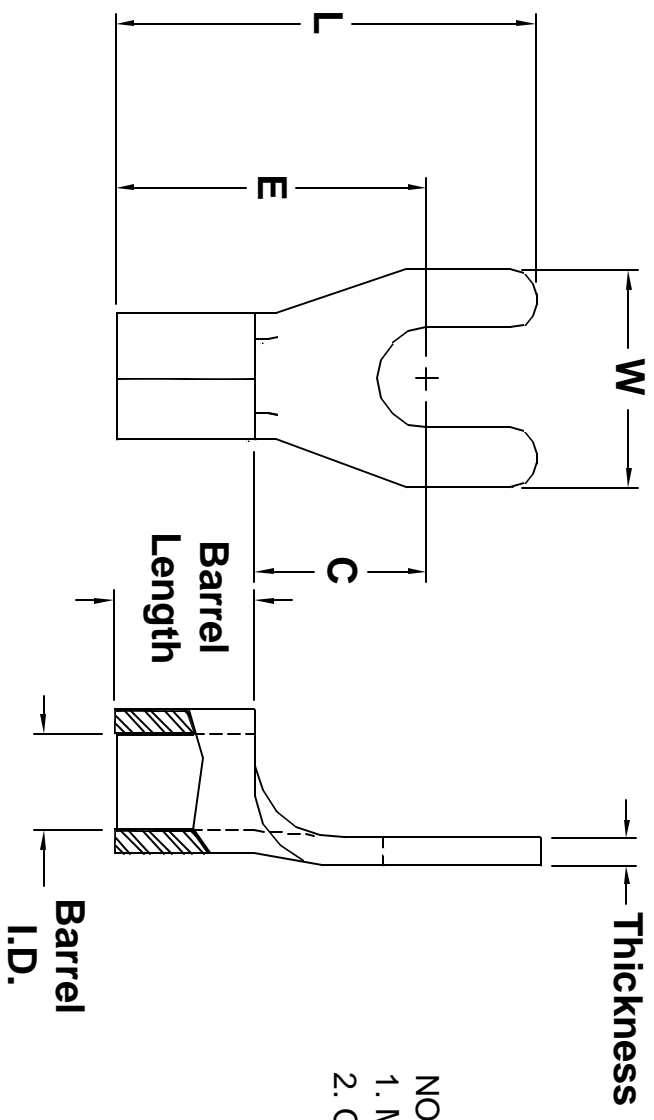

- NOTES
1. Material: Steel - Nickel Plated
 2. Operating Temp: 900°F [482°C]

SPC Type No.	Wire Range (AWG)	Stud Size	W	C	L	E	Thickness	Barrel Length	Barrel I.D.
CSS-TO-1010-HT	12 ~ 10	10	.38	.28	.73	.53	.040	.25	.135
CSS-TO-1410-HT	16 ~ 14		.34	.29	.70	.54	.030	.25	.090
CSS-TO-1810-HT	22 ~ 18		.34	.29	.70	.54	.030	.25	.070

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE NOT KNOWN OUR COMPANY, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

DRAWN BY: JC		DATE: 3/1/91	DRAWING TITLE: High Temperature Butted Seam Standard Fork Terminals	
CHECKED BY: JC		DATE: 11/27/91	SIZE: A	DWG. NO.: TA-484
APPROVED BY: JL		DATE: 11/27/91	SCALE: NTS	ELECTRONIC FILE: TA-484.dwg
			U.O.M.: INCHES [mm]	SHEET: 1 OF 1

Tolerances: Unless Otherwise Specified:
 X = ±.015
 .XX = ±.010
 .XXX = ±.005