


Shimano Hollowtech® cartridge bottom brackets tool with handle - 1671.5/2BI

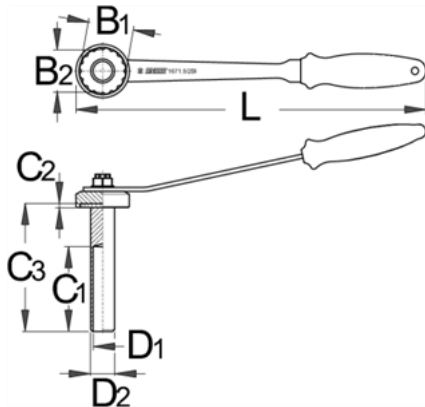

Description

- material: special tool steel, hardened and tempered
-

How to use the tool:

• The tool is composed of a wrench, screw with nut and handle. To use, put the wrench onto the bottom bracket nut, so that the screw is inserted into the bottom bracket. This prevents the wrench from slipping and damaging the bottom bracket nut when applying pressure. Your work is made easy by the 350 mm long handle with a two-component ergonomic sleeve. An additional part on the screw is a 19 mm AF to be used with a 19 mm wrench and for torque checking with a torque wrench. The wrench can also be used independently with a 19 mm wrench without the screw with nut and handle. The tool support Shimano® Hollowtech II, Campagnolo® Ultra-Torque and Power Torque, Race Face®, FSA®, SRAM®, Truvativ®, Chris King® as well as many other bottom brackets.

Technical Data

Barcode	Length	B1	B2	D1	D2	C1 x	C2 x	C3	Weight	Material	Accessories	Other
619713	348	42,7	46	18	23,8	90	5,5	128,5	780	4B	1	-

Packaging data

Barcode	Retail tool packaging				Transport package				
	Retail packing in mm (width)	Retail packing in mm (height)	Retail packing in mm (length)	Weight	Quantity	Transport packing in mm (width)	Transport packing in mm (height)	Transport packing in mm (length)	Weight
619713	58	160	500	790	4	570	62	230	3520