### "DEWALT" POWER TOOL - USA

# DEWALT DEWALT

DCF900N

## NO. S 161-8 DEWALT 20V MAX BRUSHLESS 1/2" HOG RING IMPACT WRENCH (BARE) DCF900N

High Torque Impact Wrench. Delivering 1030 ft-lbs. of max fastening torque and 1400 ft-lbs. of max breakaway torque, it is ideal for large pipe flanges, grooved couplings, wheel lugs, concrete anchor bolt setting, and other heavy-duty impact wrench applications.

	<u> </u>			
Item No.	Des	cription	Weight	Price
			(without Battery)	(set)
161-08-DCF900N	20V Max Brush	less 1/2" Hog Ring	2.9 kgs	
	Impact W	/rench (Bare)		
	Technical Specifications			
	Voltage: 2	20V Max (18V)	LED Light : Yes	
	Battery Type: L	_ithium-Ion	Brushless : Yes	
	No-Load Speed: (	)-2300 rpm	Motor	
	Impact Rate : (	)-2200 ipm		
	Max Tightening To	rque : 1396 Nm		
	Max Breakaway Torque: 1898 Nm			
	Tool Holder:	12.7 mm (1/2")		
	*** Batteries and Chargers NOT included ***			

# NO. S 161-9 DEWALT 20V MAX BRUSHLESS 1/2" HOG RING IMPACT WRENCH (5.0AH X2) DCF900P2T

High Torque Impact Wrench. Delivering 1030 ft-lbs. of max fastening torque and 1400 ft-lbs. of max breakaway torque, it is ideal for large pipe flanges, grooved couplings, wheel lugs, concrete anchor bolt setting, and other heavy-duty impact wrench applications.






DCF900P2T

### NO. S 161-10 / 10X

### DEWALT 20V MAX XR BRUSHLESS 3/8" & 1/2" SEALED HEAD RATCHET

- DCF510N (BARE)
- DCF510M2T (4.0AH X 2) Self Assembly

This cordless ratchet has a brushless motor that delivers 102Nm of max torque and a no-load speed of 0-300 RPM to fasten and remove stubborn nuts and bolts. Maximise versatility with the ability to quickly swap between interchangeable 3/8" and 1/2" square drive anvils for a variety of applications, as well as quickly change from forward/reverse for efficient working.

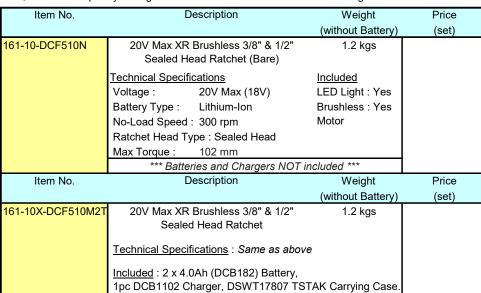







DCF510M2T