

VGA Cables

Features

- Flylead
- Free wire tinned at one end
- Cables for monitor connection to a graphics card, VGA splitter or amplifier
- PVC moulded & aluminium foil
- Screw locking mechanism

RS PRO Male VGA to Unterminated Cable – 2m

RS Stock No: 182-8881



RS PRO Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

VGA Cables

Product Description

RS PRO 2 m monitor cable comes with a high density 15 pin male connector which is commonly known as a VGA or SVGA connector to a free end. The free end allows it to be connected to screw terminals such as on some face plates or terminated on to boards. The SVGA connector is one of the most common video connectors found on computers. SVGA is an analogue signal.


General Specifications

Connector A	HD15 VGA/SVGA M
Connector B	Free End - Unterminated
Length	2 m
Outer Sheath Material	PVC
Size of Strands	28 AWG
Colour	Black

Approvals

	<u>RoHS, REACH, CE</u>
--	------------------------

VGA Cables

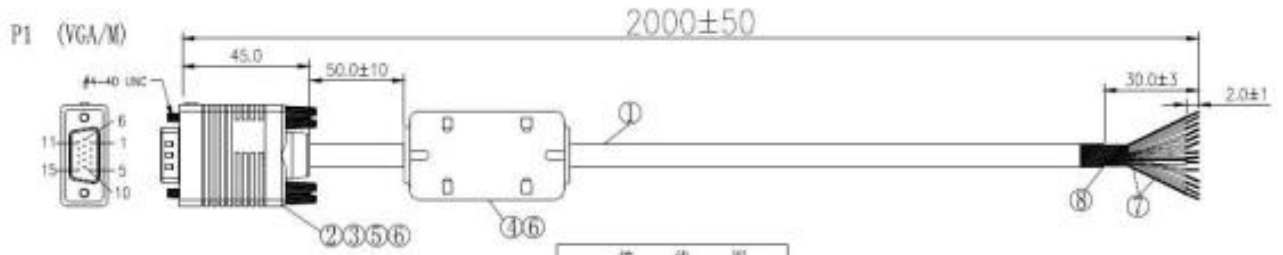

内模: DYDB-001-I
外模: DYDB-001-O

测试条件:

1. DC:300V
2. 导通: 5Ω
3. 绝缘: 20MΩ

P1	芯线颜色	P2
1	RED	S/T
2	GREEN	S/T
3	BLUE	S/T
6, 7, 8	iron shell	S/T
4	Black	S/T
5	RED	S/T
9	YELLOW	S/T
10	GREEN	S/T
11	WHITE	S/T
12	BROWN	S/T
13	PURPLE	S/T
14	BLUE	S/T
15	ORANGE	S/T

①

线材

28AWG{(7/0.12BC+FPE)*3C+D(7/0.12BC)+AL}+28AWG(7/0.12BC+PVC)*9C
+AL+D(7/0.12BC)+B(96/0.12ALM) 黑色PVC OD:6.8mm
白色印字: AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE

P1	芯线颜色	P2
1	RED	S/T
2	GREEN	S/T
3	BLUE	S/T
6, 7, 8	iron shell	S/T
4	Black	S/T
5	RED	S/T
9	YELLOW	S/T
10	GREEN	S/T
11	WHITE	S/T
12	BROWN	S/T
13	PURPLE	S/T
14	BLUE	S/T
15	ORANGE	S/T