

Datasheet

RS PRO Bearing Adapter Sleeve

Stock No: 196-4137



Technical Specifications:


| | |
|------------------|----|
| | |
| Inside Diameter | 50 |
| Locknut Diameter | 75 |
| Total Length | 59 |
| | |

Features & Benefits:

- Most commonly used method of locating bearings with a tapered bore onto a cylindrical shaft
- Easy to install
- Require no additional location on the shaft required
- Fitted with a slit that allows for easy mounting to increase flexibility
- Different Options available to suit many bearing variations
- Range of sizes available to accommodate oil injection

Dimensional line drawings

Dimensions

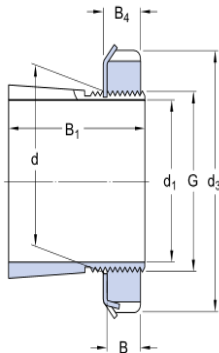

| | | |
|----------------|--------|----|
| d ₁ | 50 | mm |
| d | 55 | mm |
| d ₃ | 75 | mm |
| B ₁ | 59 | mm |
| B | 11 | mm |
| B ₄ | 12.5 | mm |
| G | M 55x2 | |

Mass

Mass adapter sleeve assembly

0.39

kg

Quality Standards

ISO – 2982-1

