

## FEATURES

- Single handed operation
- Light and compact
- Safety version
- Silicon free

# RS PRO Female Socket ISO 6150 A6

RS Stock No.: 2312494



RS PROfessionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

The RS PRO female socket works in 0 to 10 bar pressure range. It mainly used in compressed air & tools, pneumatic & fluid technology, food & beverages. It is available in nickel-plated brass and stainless steel. Used for compressed air and for moulding injection cooling system. RoHS and REACH compliant. Operating temperature range is from - 20 °C to + 80 °C.

## General Specifications


<b>Pneumatic Fitting Type</b>	Straight Fitting
<b>Angle</b>	Straight
<b>Shape Type</b>	Straight
<b>Maximum Operating Pressure</b>	10bar
<b>Food Grade</b>	Yes
<b>Applications</b>	Compressed Air & Tools, Pneumatic & Fluid Technology, Food & Beverages.

## Mechanical Specifications

<b>Connection Style</b>	Threaded-to-Tube
<b>Number of Inlet Ports</b>	1
<b>Number of Outlet Ports</b>	1
<b>Threaded Connection</b>	1/8 in Female
<b>Length</b>	34mm
<b>Wrench Size</b>	12mm

### Similar Products

Parameters	2312668	2312669
<b>Brand</b>	<b>RS PRO</b>	<b>RS PRO</b>
<b>Pneumatic Fitting Type</b>	Bulkhead Threaded-to-Tube Adaptor	Bulkhead Threaded-to-Tube Adaptor
<b>Angle</b>	Straight	Straight
<b>Shape Type</b>	Straight	Straight
<b>Maximum Operating Pressure</b>	20bar	20bar
<b>Connection Style</b>	Threaded-to-Tube	Threaded-to-Tube
<b>Number of Inlet Ports</b>	1	1
<b>Inlet Port</b>	Push In 4mm	Push In 6mm
<b>Tube Connection A</b>	Push In 4mm	Push In 6mm
<b>Tube Connection A - Tube Size</b>	4mm	6mm
<b>Tube Connection B</b>	1/8 in Female	1/4 in Female
<b>Tube Connection B - Tube Size</b>	1/8 in	1/4 in
<b>Threaded Connection</b>	1/8 in Female	1/4 in Female
<b>Length</b>	29mm	33mm
<b>Wrench Size 1</b>	15mm	16mm
<b>Wrench Size 2</b>	17mm	17mm
<b>Connector A</b>	Push In 4mm	Push In 6mm
<b>Threaded Connection A</b>	4mm	6mm
<b>Connector B</b>	1/8 in Female	1/4 in Female
<b>Threaded Connection B</b>	1/8in	1/4in
<b>Threaded Connection B – Gender</b>	Female	Female

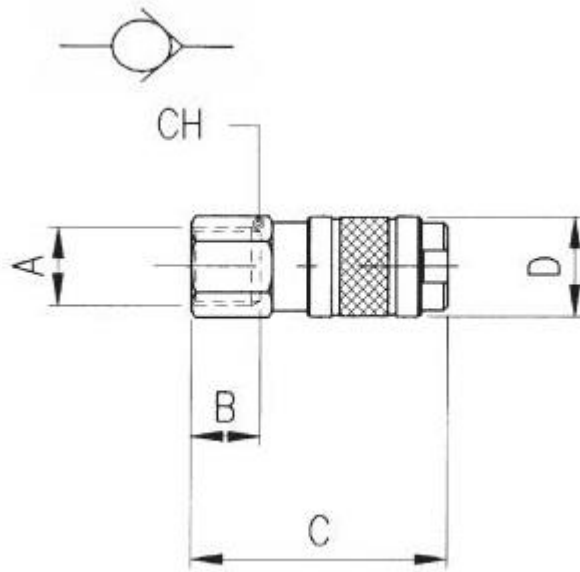

A	B	C	D	CH	Pack.
01/08	7.5	34	13	12	10