



|   |   |   |   |   |          |   |     |             |    |      |
|---|---|---|---|---|----------|---|-----|-------------|----|------|
| 1 | 2 | 3 | 4 | 5 | 6        | 7 | 8   | 9           |    |      |
|   |   |   |   |   | Customer |   | REV | DESCRIPTION | BY | DATE |
|   |   |   |   |   | DWG NO.  |   |     |             |    |      |

The cable assy should comply with the European Parliament and the Council Directive : 2011/65/EU for the restriction of hazardous substances (ROHS) . The manufacturer will provide a certification proving the ROHS compliance of the cable assy whenever customer requires such.

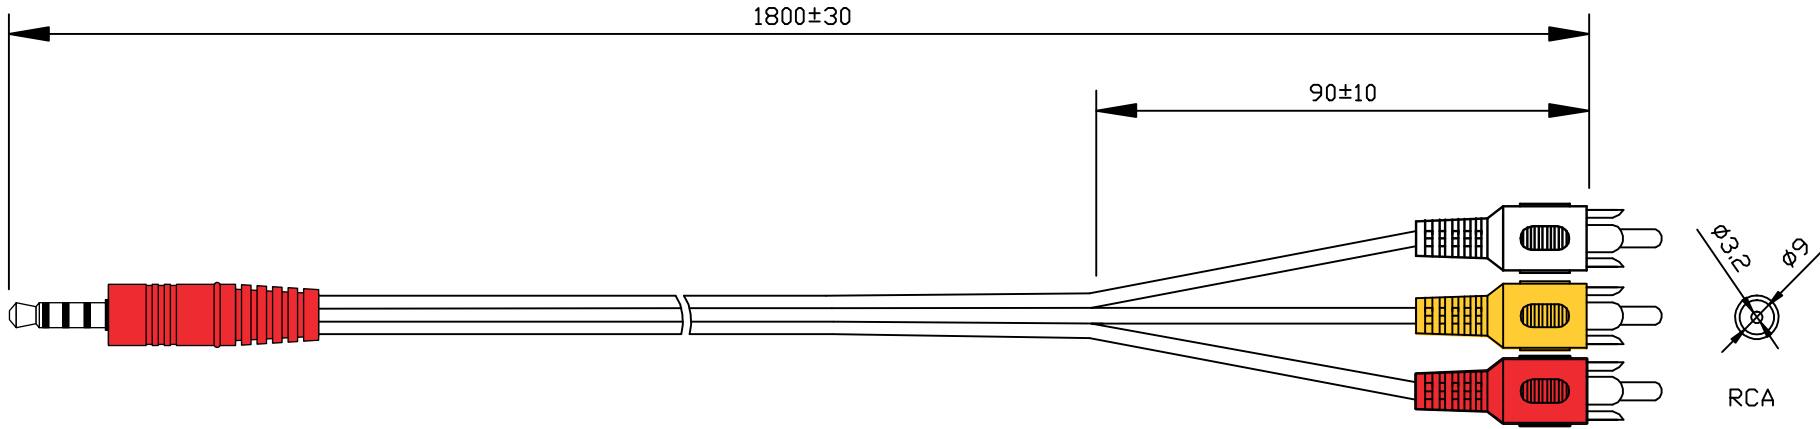

|          |        |
|----------|--------|
| 3.5 PLUG | PHONO  |
| TIP      | WHITE  |
| RING 1   | RED    |
| RING 2   | GROUND |
| RING 3   | YELLOW |

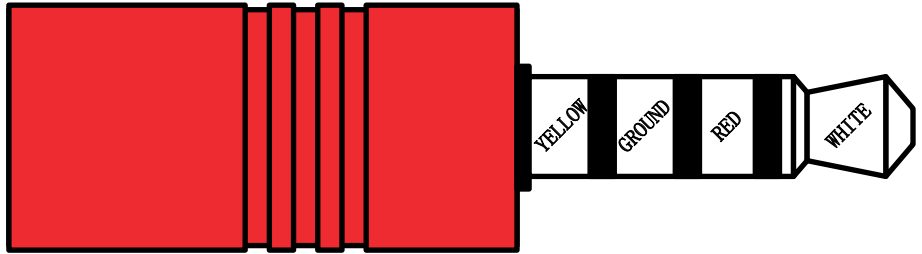

|     |             |  |     |  |
|-----|-------------|--|-----|--|
| ⑥   |             |  |     |  |
| ⑤   |             |  |     |  |
| ④   |             |  |     |  |
| ③   |             |  |     |  |
| ②   |             |  |     |  |
| ①   |             |  |     |  |
| NO. | DESCRIPTION |  | QTY |  |

|   |        |            |      |       |          |          |
|---|--------|------------|------|-------|----------|----------|
| TOLERANCES<br>.XXX ±.025mm<br>.XX ±.100mm<br>.X ±.250mm<br>Wire Length<br>0-100 ±5mm<br>101-300 ±10mm<br>301-500 ±15mm<br>501-<1000 ±20mm<br>1000-<2000 ±50mm<br>2000+ ±100mm | P/N:   |            |      |       |          |          |
|   | TITLE: |            |      |       |          |          |
|   | SHEET  | PROJECTION | UNIT | DRAWN | VERIFIED | APPROVED |
|   | 1 OF 1 |            | MM   |       |          |          |