



RSV-24 Nylon

- Air Permeability (ml/min@0.07bar): 7500-1900
- Membrane material: ePTFE
- O-ring: Silica gel 60H shore hardness A
- Flammability UL94: V-0
- Anti-UV: 4-5 Level
- Salt Resistance: 10<0.1%
- Temperature: -40 C~120 C



Thread Spec. Specification	Thread OD (AG)	Thread Length (GL)	Hieght (H)	Material Grey RAL 7035	Reference
M24x1.5	24	15	23.4	PA66+25% Glass Fibre	9HTRSV-M24*1.5-IP66

Thread Standard & Installing Hole Opening Data

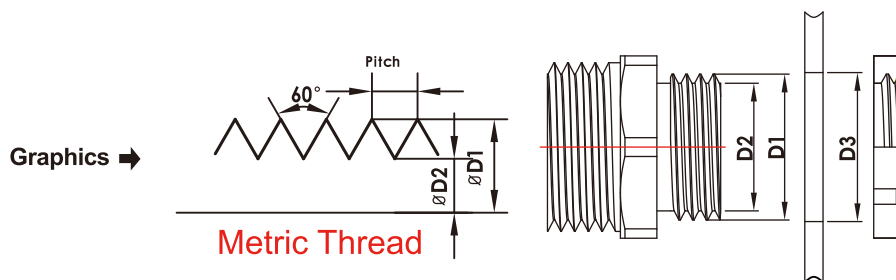

Thread Specification	Pitch	Nominal Size D1	Core Diameter D2	Bore Through D3
M12×1.5	1.5	12	10.5	12-12.5
M16×1.5	1.5	16	14.5	16-16.5
M20×1.5	1.5	20	18.5	20-20.5
M25×1.5	1.5	25	23.5	25-25.5
M32×1.5	1.5	30	30.5	32-32.5
M40× 1.5	1.5	40	38.5	40-40.5
M50×1.5	1.5	50	48.5	50-50.5
M63×1.5	1.5	63	61.5	63-63.5

Note:

1) Made under OEM arrangement by reputable cable gland manufacturer