

Datasheet

Stock No: 179-2915, 179-2916, 179-2920, 179-2921, 179-2922
Analogue Dial Multifunction Timer




Specifications:

- 11 pin plug-in
- Analogue Dial Display
- Multi-function timer

RS Stock No	179-2915	179-2916	179-2920	179-2921	179-2922
Specification					
Supply Voltage	100-240Vac 100-125Vdc	24-48Vac 12-48Vdc	220Vac	110Vac	24Vdc
Operating Voltage Range	85~110% of rated supply voltage				
Display type	Analogue Dial Display				
Timing Function	B: ON-delay, F: Flicker ON start, R: Flicker OFF start, C: signal ON/OFF delay, D: signal OFF delay, E: Interval				
Timing Range	0.1s – 300h				
Contact	Configuration	2PDT (2C)			
	Rated Current AC-1	5A @ 250VAC (p.f. =1)			
Repetitive Error	±0.3% (FS max.), (±0.3% 10ms max. in range of 1.2s)				
Setting Error	±5% (FS max.) ±5ms				
Voltage Error	±0.5% (FS max.) (±0.5% ±10ms max. in a range of 1.2s)				
Temperature Error	±2% (FS max.) (±2%±10ms max. in a range of 1.2s)				
Resetting Time	0.1sec				
Insulation resistance	100MW (DC500V)				
Vibration Resistance	Destruction	10~55Hz with 0.75mm single amplitude each in 3directions for 2 hours each			
	Malfunction	10~55Hz with 0.5mm single amplitude each in 3 directions for 10 minutes each			
Shock Resistance	Destruction	30G			
	Malfunction	10G			
Life Expectancy	Electrical Life	> 10 ⁷			
	Mechanical Life	> 10 ⁵ (AC 250V, 5A)			
Mounting	11 Plug-in, Panel Mount				
Unit Weight	Approx.95g				
Certification					

Mounting Dimensions (mm)

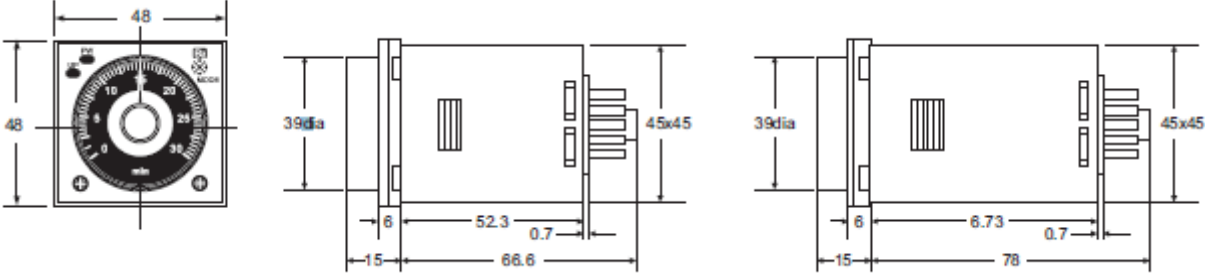

Connection Diagram

