


NO	DESCRIPTION	DATE
△1	BACKGROUND FORMAT UPDATED	03.29.04'
△2	BACKGROUND FORMAT UPDATED	04.14.09'
△3	DEL WORKING VOLTAGE DEL PROOF VOLTAGE ADD DC RESISTANCE ADD POWER RATING	11.08.11'
△4	ADD VSWR	11.07.12'
△5	13-58/R13-058-00-003321029 → 40131001300006	11.26.19'

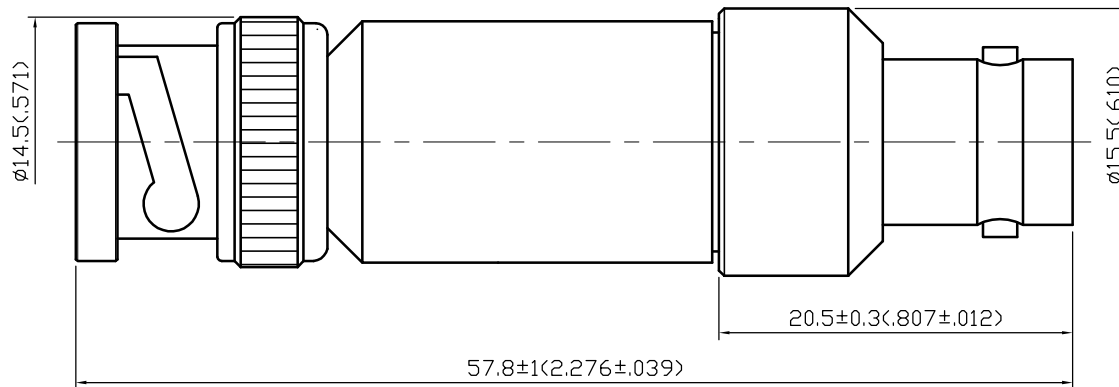

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-1 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 DC RESISTANCE: 50 OHMS±5% △3
- 1.4 POWER RATING: 2W △3
- 1.5 VSWR: 1.7 MAX. @300 MHz △4

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -40° C TO +70° C

11	INSULATION	TEFLON	1	NONE
10	BODY	BRASS	1	SILVER 70μ" MIN.
9	RESISTOR	2W-50Ω	1	NONE
8	BODY	BRASS	1	SILVER 70μ" MIN.
7	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD
6	WASHER	BRASS	1	SILVER 70μ" MIN.
5	SPRING WASHER	SK-5	1	NICKEL
4	WASHER	BRASS	1	NICKEL
3	GASKET	SILICONE	1	RED
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	SILVER 70μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH



APPROVED by _____ DATE: _____

DESCRIPTION		STRAIGHT BNC PLUG-JACK FEEDTHRU TERMINATION						
製圖	DRAWN	TOLERANCE	品名	40131001300006△	DATE	11.01.00'	版次	REV.
	Amy	.X ±0.2	TITLE	\ROHS COMPLIANT <50Ω>	日期			A-5
檢圖	CHECK	.XX ±0.1	單位	mm(in)	DWG.NO.			
	Leona	.XXX ±0.05	比例	SCALE				
認定	APPROVAL	ANGLE ±5°	比例	3:1				
	Jenny							