



Data Sheet


RS Slotted Trunking

ENGLISH


Open slotted trunking for use in wiring applications where cable protection is essential



STANDARD 8mm SLOT

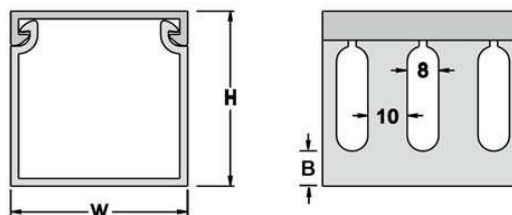

NARROW 4mm SLOT

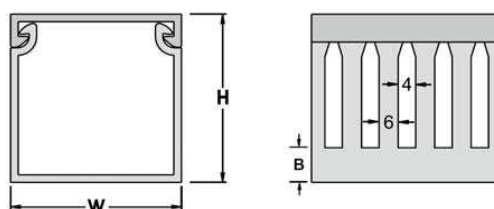

SPECIFICATION

- Material: High impact, warp-proof, self-extinguishing PVC
- UL approved 94V-0
- Maximum service temperature: 85°C
- Test to UL file E97527 up to 50 °C
- Standards: UL, CSA approved
- Color: Grey
- Trunking length 2 metres
- Supplied complete with cover
- Pack quantity is 8 lengths

| RS Stock Number | W (mm) | H (mm) | B (mm) |
|-----------------|--------|--------|--------|
| 758-9260 | 15 | 25 | 6 |
| 758-9279 | 25 | 30 | 6 |
| 758-9272 | 25 | 40 | 10 |
| 758-9276 | 25 | 60 | 13 |
| 758-9285 | 25 | 80 | 19 |
| 758-9288 | 40 | 40 | 10 |
| 758-9282 | 40 | 60 | 13 |
| 758-9291 | 40 | 80 | 11 |
| 758-9294 | 60 | 40 | 10 |
| 758-9298 | 60 | 60 | 13 |
| 758-9308 | 60 | 80 | 11 |
| 758-9301 | 60 | 100 | 15 |
| 758-9305 | 80 | 60 | 13 |
| 758-9314 | 80 | 80 | 13 |
| 758-9317 | 80 | 100 | 15 |
| 758-9311 | 100 | 40 | 11 |
| 758-9320 | 100 | 80 | 13 |

| RS Stock Number | W (mm) | H (mm) | B (mm) |
|-----------------|--------|--------|--------|
| 758-9204 | 25 | 30 | 6 |
| 758-9213 | 25 | 40 | 9 |
| 758-9216 | 25 | 60 | 13 |
| 758-9210 | 25 | 80 | 18 |
| 758-9229 | 40 | 40 | 11 |
| 758-9222 | 40 | 60 | 13 |
| 758-9226 | 40 | 80 | 10 |
| 758-9235 | 60 | 40 | 9 |
| 758-9238 | 60 | 60 | 13 |
| 758-9232 | 60 | 80 | 10 |
| 758-9241 | 60 | 100 | 15 |
| 758-9244 | 80 | 60 | 13 |
| 758-9248 | 80 | 80 | 13 |
| 758-9257 | 80 | 100 | 15 |
| 758-9250 | 100 | 40 | 11 |
| 758-9254 | 100 | 80 | 14 |
| 758-9263 | 100 | 100 | 16 |
| 758-9266 | 120 | 60 | 17 |