


Solid-state Multi-functional Timers

H3CR-A-301 AC100-240/DC100-125

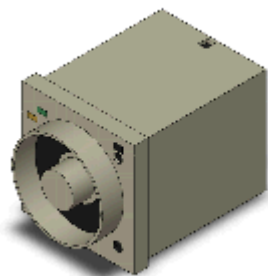

Image

100 to 240 VAC 50/60 Hz, 100 to 125 VDC, Input No-voltage input, Output Time-limit: DPDT, ON delay/Flicker OFF start/Flicker ON start/Signal ON/OFF delay/Signal OFF delay/Interval/Signal ON/OFF delay/One shot output, Time range: 0.1 to 2.4 s (18 range), 11-pin

Rated power supply voltage	100 to 240 VAC 50/60 Hz 100 to 125 VDC Ripple 20% max. (If power supply incorporates a single-phase full-wave rectifier)
Input signals	Start, Reset, Gate
Input method	No-voltage input
Control output (Type)	Time-limit: DPDT
Operating resetting	Time-limit operation/Self-reset/External reset
Connecting method	11-pin round socket

Ratings/Specifications

As of July 16, 2020

Rated power supply voltage	100 to 240 VAC 50/60 Hz 100 to 125 VDC Ripple 20% max. (If power supply incorporates a single-phase full-wave rectifier)
Allowable voltage variable range	85% to 110% of rated voltage
Input signals	Start, Reset, Gate
Input method	No-voltage input
No-voltage input	Short-circuit (ON) impedance: 1 kΩ max. Short-circuit (ON) residual voltage: 1 V max. Open circuit impedance: 100 kΩ min.
Power consumption	Relay ON: Approx. 2 VA (at 240 VAC 60 Hz)/Relay OFF: Approx. 1.3 VA (at 240 VAC 60 Hz) Relay ON: Approx. 1.6 W (at 240 VAC 60 Hz)/Relay OFF: Approx. 1.1 W (at 240 VAC 60 Hz)
Reset voltage	10% max. of rated supply voltage
Number of time ranges	18
Operation mode	ON delay, Flicker OFF start, Flicker ON start, Signal ON/OFF delay, Signal OFF delay, Interval, Signal ON/OFF delay, One shot output
Control output (Type)	Time-limit: DPDT
Control output (Contact output)	Resistive load: 250 VAC 5 A (cosφ=1)/5 A at 30 VDC/ Inductive load (Reference value): 2 A at 250 VAC (cosφ=0.4)/3 A at 30 VDC (L/R=7 ms) Minimum applicable load: 10 mA at 5 VDC (failure level: P Reference value)
Operating resetting	Time-limit operation/Self-reset/External reset


Ambient temperature range	Operating: -10 to 55 °C (with no icing) Storage: -25 to 65 °C (with no icing)
Ambient humidity range	Operating: 35 to 85%
Accuracy of operating time	±0.2% FS max. ±0.2% ±10 ms in a range of 2.4 s and 6 s
Setting error	±5% FS ±50 ms max.
Reset time	0.1 s max.
Influence of voltage	±0.2% FS max. ±0.2% ±10 ms in a range of 2.4 s and 6 s
Influence of temperature	±1% FS max. (±1% ±10 ms in a range of 2.4 s and 6 s)
Insulation resistance	100 MΩ min. (at 500 VDC)
Dielectric strength	Between current carrying metal parts and non-current carrying metal parts: 2,000 VAC 50/60 Hz 1 min Between control output terminals and operating circuit: 2,000 VAC 50/60 Hz 1 min Between contacts of different polarity: 2,000 VAC 50/60 Hz 1 min Between non-continuous contacts: 1,000 VAC 50/60 Hz 1 min
Impulse withstand voltage	Between power terminals: 5 kV Between current carrying terminals and exposed non-current carrying metal parts: 5 kV
Noise immunity	±1.5 kV (between power terminals) and ±600 V (between No-voltage input terminals), square-wave noise by noise simulator (pulse width: 100 ns/1 μs, 1-ns rise)
Static immunity	Multifunction: 8 kV, Destruction: 15 kV
Vibration resistance	Destruction: 10 to 55 Hz, 0.75 mm single amplitude each in 3 directions for 2 h Malfunction: 10 to 55 Hz, 0.5 mm single amplitude each in 3 directions for 10 min
Shock resistance	Destruction: 1,000 m/s ² , 3 times each in 6 directions Malfunction: 100 m/s ² , 3 times each in 6 directions
Life expectancy (relay output)	Electrical: 100,000 operations min. (5 A at 250 VAC, resistive load at 1800 operations/h) Mechanical: 20 million operations min. (under no load at 1,800 operations/h)
Degree of protection	Panel surface: IP40 Terminals: IP00
Connecting method	11-pin round socket
Case color	Munsell 5Y7/1
Accessories	Instruction manual, Compliance information sheet
Weight	Approx. 90 g

As of July 16, 2020

Dimensions

As of July 16, 2020

Outline drawing

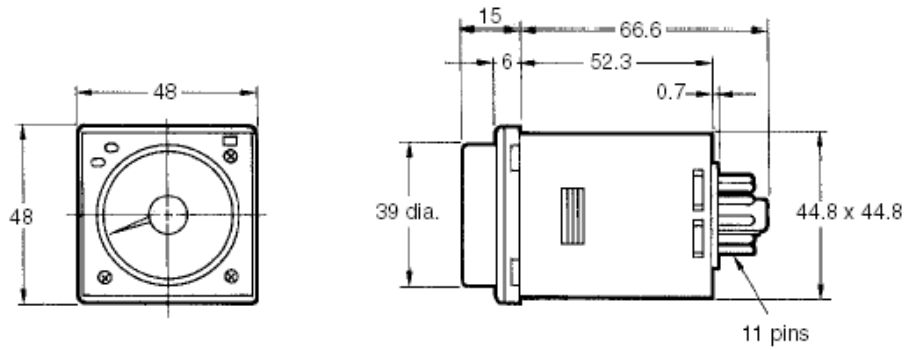


As of July 16, 2020

Internal connection

As of July 16, 2020

Internal connection

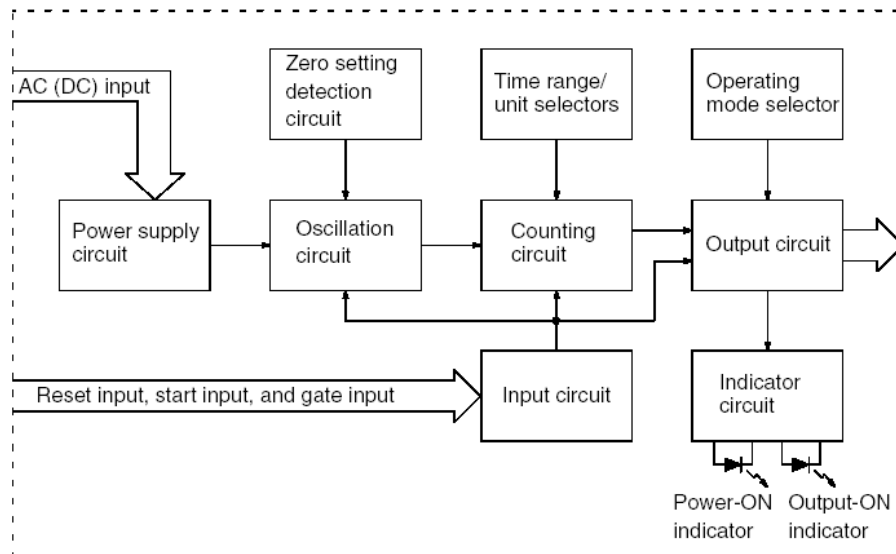


As of July 16, 2020

Terminal arrangement

As of July 16, 2020

Terminal arrangement

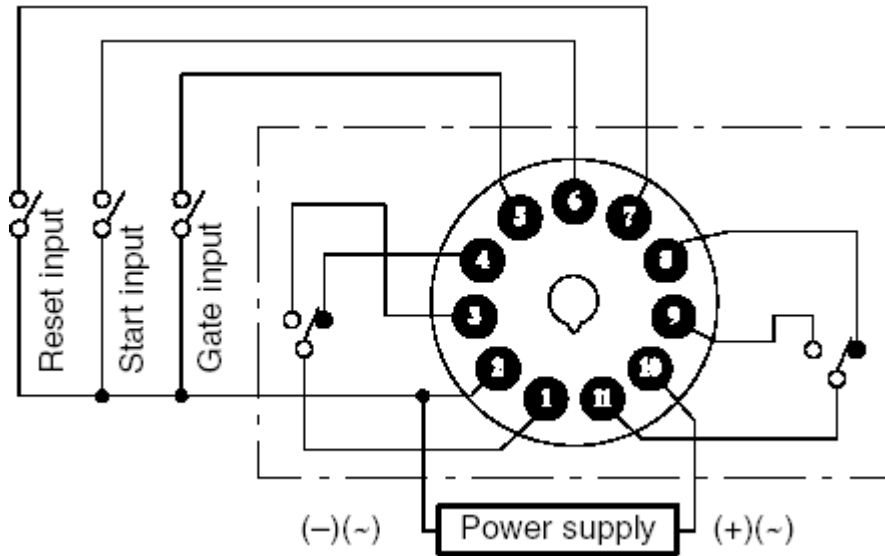

As of July 16, 2020

Input connections

As of July 16, 2020

Input connections


H3CR-A/-AS/-A-301

The inputs of the H3CR-A/-AS/-A-301 are no-voltage (short-circuit or open) inputs.


No-voltage Inputs

No-contact Input

(Connection to NPN open collector output sensor.)

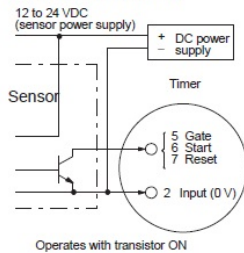


Contact Input



No-contact Input

(Connection to a voltage output sensor.)

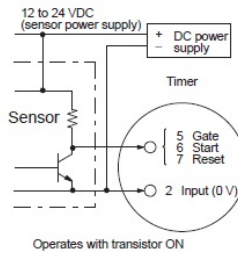

No-voltage Input Signal Levels

No-contact input	1. Short-circuit level Transistor ON Residual voltage: 1 V max. Impedance when ON: 1 kΩ max.
	2. Open level Transistor OFF Impedance when OFF: 100 kΩ min.
Contact input	Use contacts which can adequately switch 0.1 mA at 5 V

As of July 16, 2020

Time ranges

Time ranges

Double (0.1-s to 600-h) Models


Time unit	s (sec)	×10 s (10 sec)	min (min)	×10 min (10 min)	h (hrs)	×10 h (10 hrs)
Full scale setting	2.4	0.1 to 2.4	2.4 to 24	0.24 to 2.4	2.4 to 24	0.24 to 2.4
	6	0.6 to 6	6 to 60	0.6 to 6	6 to 60	0.6 to 6
	24	2.4 to 24	24 to 240	2.4 to 24	24 to 240	2.4 to 24
	60	6 to 60	60 to 600	6 to 60	60 to 600	6 to 60

Note: When the time setting knob is turned below "0" until the point where the time setting knob stops, the output will operate instantaneously at all time range settings.


Operating chart

Operating chart


ON delay

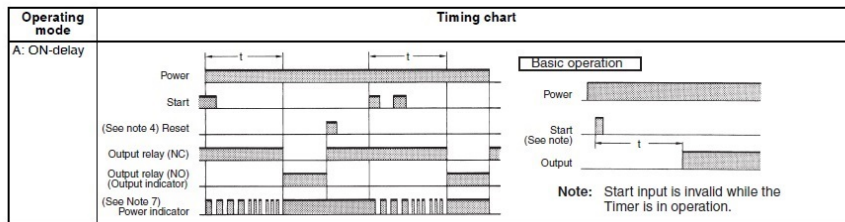


Flicker OFF start

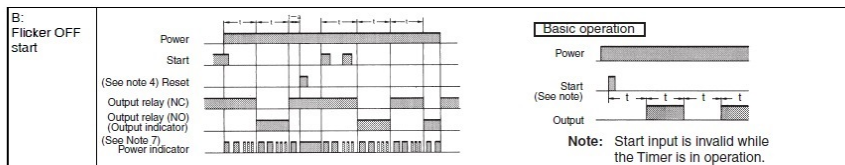

Flicker ON start

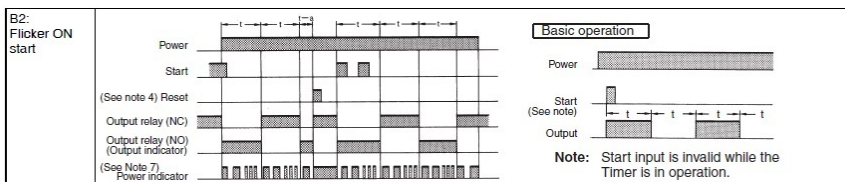


Signal ON/OFF delay (C)

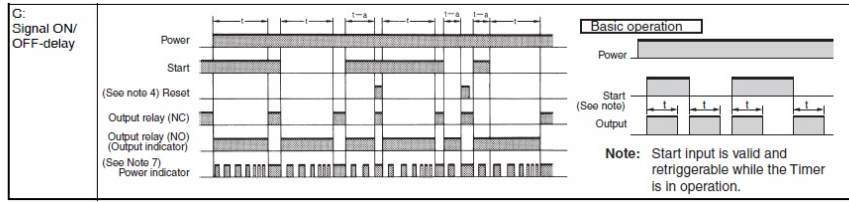


- 1. Allow at least 0.1 s for the Timer reset time if the power supply is reset due to an interruption in the power supply.
- 2. The minimum input pulse width (for start, reset) is 0.05 s.
- 3. The letter "t" in the timing charts indicates the set time, and "t-a" means that the period is less than the set time. ($t - a < t$)
- 4. H3CR-AP model incorporates start input only. As such, the power supply is reset.
- 5. Model H3CR-AS only has operation equivalent to time-limit contact: NO.
- 6. When the setting dial is turned all the way past 0 for instantaneous output, "t" (set time) in the above time chart is 0-sec operation.
- 7. During timer operation, the flash frequency changes when 90% of the set time has been reached.


Signal OFF delay

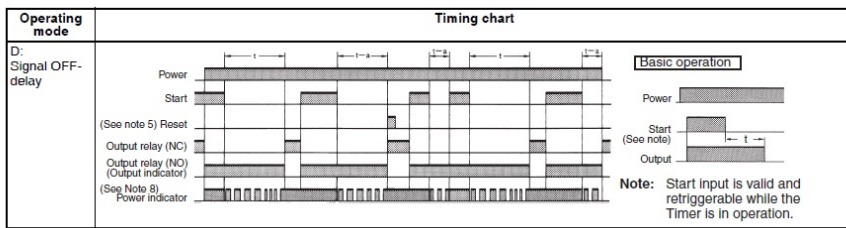


Interval

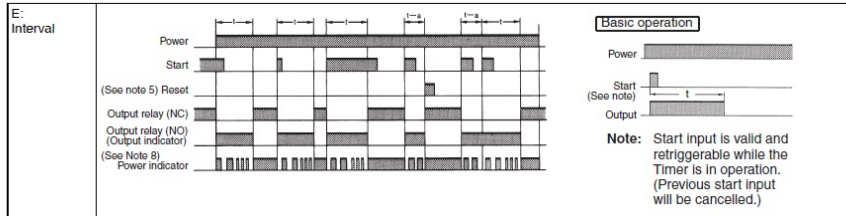

Signal ON/OFF delay (G)

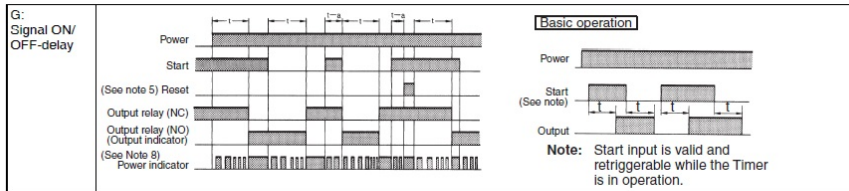


One shot output

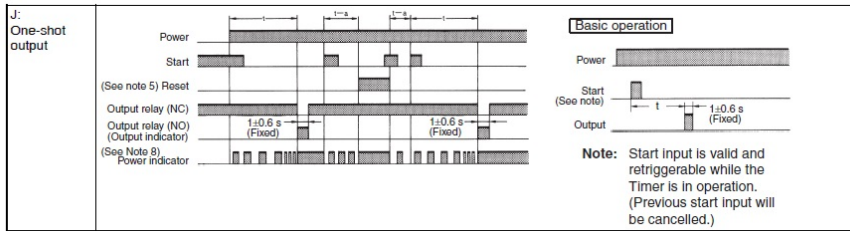

- Note:**
1. Allow at least 0.1 s for the Timer reset time if the power supply is reset due to an interruption in the power supply.
 2. The minimum input pulse width (for start, reset) is 0.05 s.
 3. The letter "t" in the timing charts indicates the set time, and "t-a" means that the period is less than the set time. (t - a < 1)
 4. In J Mode, there will be only one output even if the start input is longer than the set time.
 5. H3CR-AP model incorporates start input only. As such, the power supply is reset.
 6. Model H3CR-AS only has operation equivalent to time-limit contact: NO.
 7. When the setting dial is turned all the way past 0 for instantaneous output, "t" (set time) in the above time chart is 0-sec operation.
 8. During timer operation, the flash frequency changes when 90% of the set time has been reached.

Gate Signal Input (This timing chart indicates the gate input in operating mode A (ON-delay operation).)

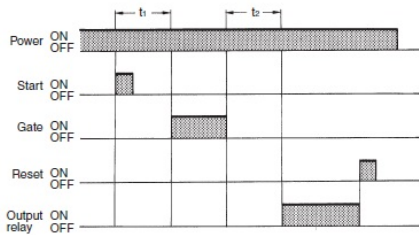


Note: The set time is the sum of t1 and t2. Start and reset are also both enabled when the gate signal is ON.

As of July 16, 2020

Electrical life curve

As of July 16, 2020

Electrical life curve

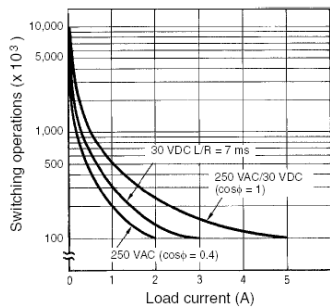

Reference: A maximum current of 0.15 A can be switched at 125 VDC (cosφ = 1) and a maximum current of 0.1 A can be switched if L/R is 7 ms. In both cases, a life of 100,000 operations can be expected. The minimum applicable load is 10 mA (100 mA for H3CR-A8E) at 5 VDC (failure level: P).

As of July 16, 2020