

Datasheet

RS PRO FUSE HOLDER

Stock No:237-5258




Technical Specifications:

Rating	5A250V Maximun
Material	Black Nylon and brass
Applicable	5X20MM Tube Fuse
Wire	UL1015 20AWG100MM*2 red

Features & Benefits:

- compatible fuses: 5X 20mm tube fuse
- Maximum current rating are 5 amperes at 250V
- wire is 1015 20AWG red , nominal OD is 2.5mm
- lead pull test will withstand 10lb. Pull.
- Ambient temperature is -40°C to +80 °C.
- Packaging is 100PCS bulk pack.

Dimensional line drawings

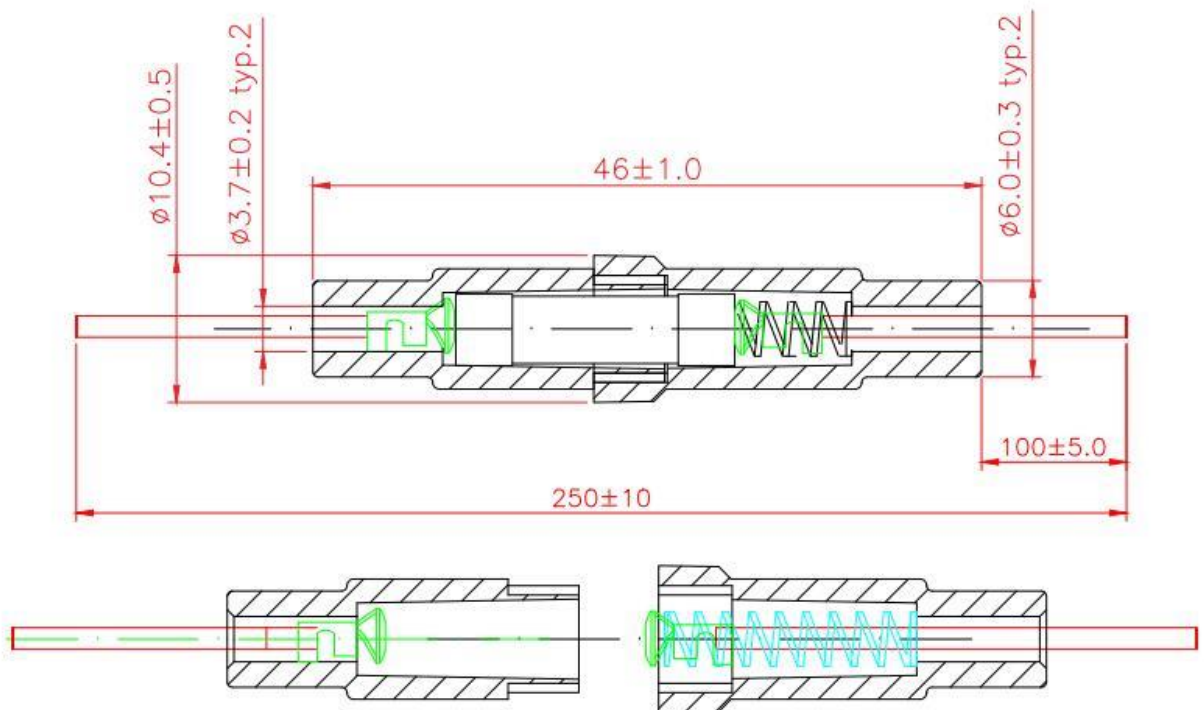

Warning: If use above 32V, Power must be turn off when changing the fuse.