
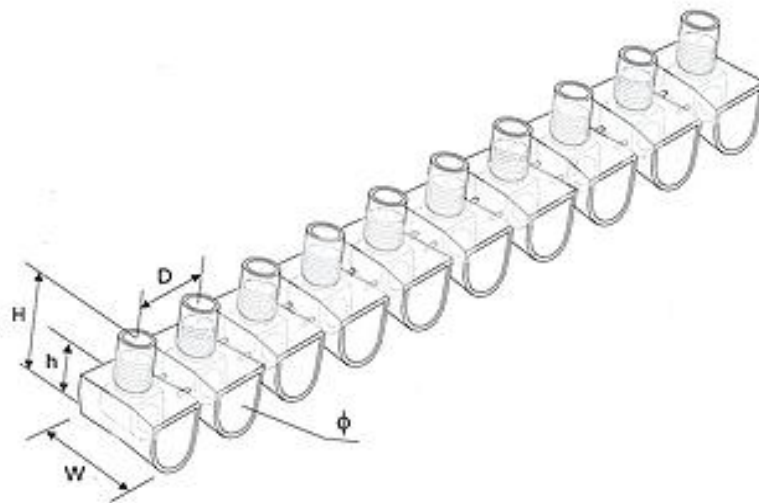


Datasheet

Single-Side-Entry Terminal Blocks

SPECIFICATIONS

INSERTS: BRASS
HOUSING: POLYCARBONATE (PC)
TEMP: 85° MAX 130 °C
SCREWS: GALVANISED STEEL
STANDARDS: IMQ & CE
COLOUR: CLEAR
FEATURES: RIGID AND EASY CUT
 FLAME RETARDANT
 ALL SCREWS ARE CAPTIVE
 & RAISED FOR EASY WIRING
 IP20

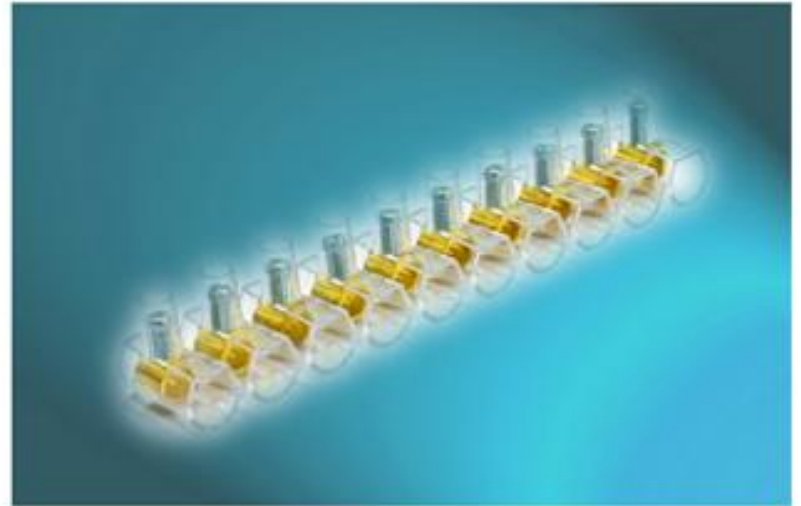

RS Stock No.	CODE	POLES	CROSS SECTION	CURRENT RANGE	RATED VOLTAGE	DIMENSIONS (mm)				
						W	φ	D	H	h
7869196	COE-1.5	1/2/3/10	1.5 mm ²	24 A	450 V	15.0	3.3	9.4	16.3	9.3
7869190	COE-2.5	1/2/3/10	2.5 mm ²	24 A	450 V	71.3	4.0	10.1	17.5	10.0
7869200	COE-4	1/2/3/10	4 mm ²	32 A	450 V	21.0	4.3	12.0	19.5	10.5
7869203	COE-6	1/2/3/10	6 mm ²	41 A	500 V	22.5	6.1	13.5	23.3	12.8
7869207	COE-10	1/2/3/10	10 mm ²	57 A	500 V	26.0	7.0	16.5	28.3	16.0
7869216	COE-16	1/2/3/10	16 mm ²	76 A	500 V	31.0	10.0	22.0	33.7	18.0
7869219	COE-25	1	25 mm ²	101 A	500 V	37.3	12.0	—	40.5	21.5
7869213	COE-35	1	35 mm ²	125 A	500 V	45.0	14.0	—	44.0	25.0

Cross-section rated for rigid wire

φ = wire entry hole diameter equivalent to the fixing hole diameter