



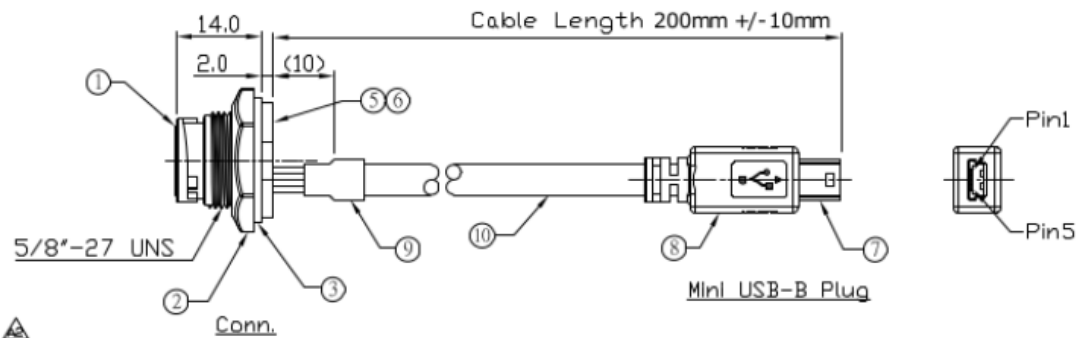


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: 125-7925
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Vicky 11/17/10	Lucas 11/17/10	Ray 11/17/10
A1	ECN-140805	Modify Item 9, Shrink Tube L=10mm to 20mm	Joyce 08/07/14	Lucas 08/07/14	Ray 08/07/14
A2	ECN-141115	Change Cable Type	Lucas 12/05/14	Lucas 12/05/14	Ray 12/05/14



10	Cable	UL2725 1P*28AWG+3C*24AWG+AL/My+D+B OD=5.0mm, Color: Black	1	
9	Shrink Tube	L=20mm Color: Black	1	
8	Over Mold	PVC Color: Black	1	
7	Mini USB-B Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1	
6	Gue	Epoxy Color: Black		
5	PCB	FR-4 Color: —	1	
4	Mini USB-B Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1	
3	Gasket	Silicone Color: Black	1	
2	Hex Nut	Thermoplastic Color: Black	1	
1	Housing	Thermoplastic Color: Black	1	
Item	Part Name	Material / Finish	Qty	



Recommend
Panel Cut-Out



Conn. Mini USB-B Plug

Wiring Diagram

Mating Part:
122-3019

RS Stock No
111-6755

TITLE										
Mini USB-B Plastic C2 Panel Jack Lock With Cable + Mini USB-B Plug										
	B	1:1	Vicky 11/17/10	Lucas 11/17/10	Ray 11/17/10	XX ± 0.5 XXX ± 0.2	XXXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	