



Datasheet

Stock No. 190-2831, 190-2832, 190-2833









RS PRO 50MM STEADY/FLASHING LIGHT TOWER 2 COLOUR



ENGLISH

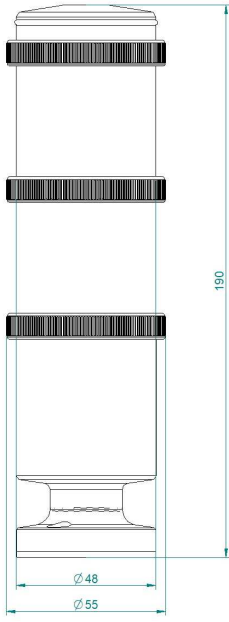


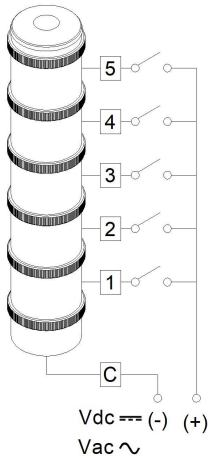
Luminous warning STACK LIGHT.

BODY	PC												
RING	PC												
LUMINOUS SOURCE	N°4 LED												
AVAILABLE COLOURS	 												
VOLTAGE	24 Vac/dc – 110 Vac - 240 Vac												
OPERATION	∞												
CURRENT CONSUMPTION	<table border="1"> <thead> <tr> <th>Stock No</th> <th>1902831</th> <th>1902832</th> <th>1902833</th> </tr> </thead> <tbody> <tr> <td>VOLTAGE</td> <td>24 Vac/dc</td> <td>110 Vac</td> <td>240 Vac</td> </tr> <tr> <td>MAX (mA)</td> <td>60</td> <td>130</td> <td>110</td> </tr> </tbody> </table>	Stock No	1902831	1902832	1902833	VOLTAGE	24 Vac/dc	110 Vac	240 Vac	MAX (mA)	60	130	110
Stock No	1902831	1902832	1902833										
VOLTAGE	24 Vac/dc	110 Vac	240 Vac										
MAX (mA)	60	130	110										
LIGHT OUTPUT	<table border="1"> <thead> <tr> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>ALL COLOR Cd(p)</td> <td>3</td> <td>2</td> </tr> </tbody> </table>				ALL COLOR Cd(p)	3	2						
													
ALL COLOR Cd(p)	3	2											
LIGHT EFFECT	Steady - Flashing												

These data are disclosed only for information purposes. Sirena S.p.A. reserves the right to modify them at any time without prior notice.

IP RATING	IP66
OPERATING TEMPERATURE	-30°C+50°C
VIBRATIONS	INDUSTRIAL CEI 60068-2-6 SINE
CERTIFICATIONS, APPROVALS	CE
MOUNTING	Ring

TECHNICAL DRAWING	
--------------------------	---

ELECTRICAL WIRING	
--------------------------	--