


Datasheet

RS: 125-1971

HEAT SHRINKABLE – SPADE TERMINALS

“HB” (BRAZED TYPE)

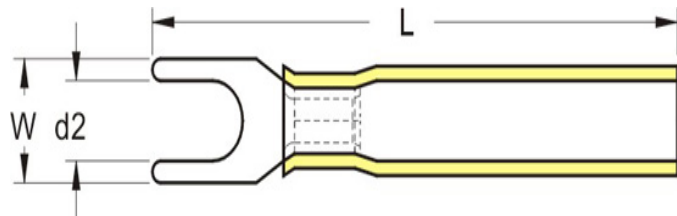

WIRE RANGE A.W.G. / mm ²	ITEM NO.	STUD SIZE		DIMENSION inch(mm)		INSULATE D COLOR	QTY BOX
		d2		W	L		
22-16 A.W.G.	125-1971	#6	3.7	0.252	1.154	RED	1000
0.5-1.5 mm ²				6.4	29.3		

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16
AMP.	9	12	17	18

MAXIMUM ELECTRICAL RATING: 600 VOLTS MAX.

SHRINK TEMP.: 150°C

OPERATING TEMP.: -10°C~ +105°C

INSULATION MATERIAL: HIGHT DENSITY PE.

TERMINAL MATERIAL: COPPER