


NO	DESCRIPTION	DATE
△	USE STAINLESS STEEL INSTEAD OF BRASS	05.15.95
△	FLAT 9.5X2 — FLATS 8.0	12.15.98
△	BACKGROUND FORMAT UPDATED	05.02.02
△	BACKGROUND FORMAT UPDATED	07.21.09

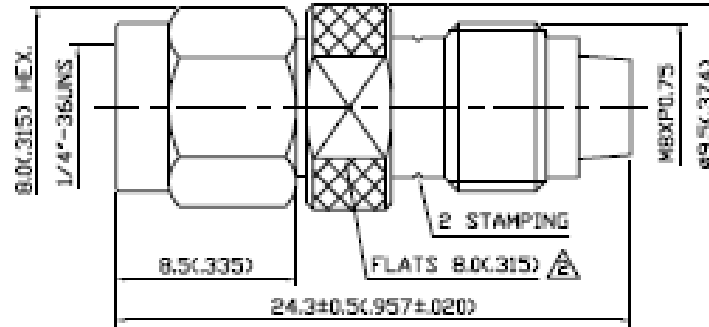

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-900 MHz
1.2 NOMINAL IMPEDANCE: 50 OHM

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS-C3804
2.2 CENTER CONTACT: BRASS PER JIS-C3804
2.3 INSULATION: TEFLON PER ASTM D3457 AND ASTM D3710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 ENVIRONMENTAL

4.1 OPERATING TEMPERATURE RANGE: -55° C TO +125° C

APPROVED

by _____ DATE: _____

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
7	INSULATION II	TEFLON	1	NONE
6	CENTER CONTACT	BRASS	1	GOLD
5	BODY	BRASS	1	NICKEL, 100μ ² MIN.
4	INSULATION I	TEFLON	1	NONE
3	WASHER	STAINLESS STEEL	1	NONE
2	GASKET	SILICONE	1	RED
1	SHELL	BRASS	1	NICKEL, 100μ ² MIN.



DESCRIPTION		FME JACK - SMA PLUG	
製圖	DRAWN	TOLERANCE	品名
檢圖	Yoko	X ±0.2	23-18 T.G.N
規定	CHECK	XX ±0.1	TITLE
	Jacky	.XXX ±0.05	\ROHS COMPLIANT (500)
	APPROVAL	ANGLE ±5°	單位
	Lewis		mm(in)
			SCALE
			4:1
			DWG.NO.
			23-0050
			DATE
			07.13.92
			版次
			A-4