




Datasheet

RS PRO AC AXIAL FAN 230VAC 200×220×70mm ALL METAL IP56

EN

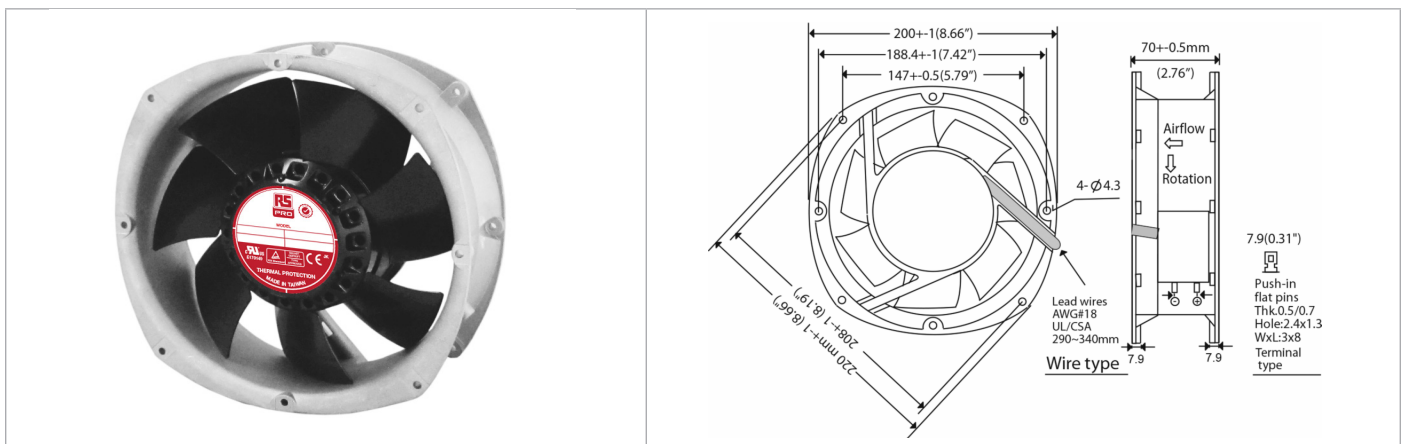

Frame	Diecast Aluminum	<u>Operating Temperature</u> Ball Bearing -20C ~ +70C (non-condensing) Storage Temp -40C ~ +100C	
Impeller	Metal Alloy	<u>Life Expectancy</u> Ball Bearing 50,000 hours (L10 at 55C) Environmental Protection IP56	
Connection	2x Lead Wires 18 AWG or terminals	Weight: ~ 1.814 kg (4 lbs)	
Motor	AC Capacitor Inductance, thermally protected	m0	
Bearing System	Dual ball bearing		
Insulation Resistance	>100M ohm between lead-wire and frame (500VDC)		
Dielectric Strength	1 min at 1500 VAC, 50/60Hz		

Model Number	175-9796	175-9825
Connections	Wire Leads	Terminals
Speed (RPM)	2800 / 3300	2800 / 3300
Airflow (CFM)	430 / 485	430 / 485
Noise Level (dB)	68	68
Volts AC	230	230
Voltage Range	200-240	200-240
Watts	95 / 105	95 / 105
Max. Static Pressure	0.82/0.93" H ₂ O	0.82/0.93" H ₂ O
Curves	2 (50Hz) / 1 (60Hz)	2 (50Hz) / 1 (60Hz)