


## Datasheet

### High-Power Stud Terminal

RS Stock number 872-5625

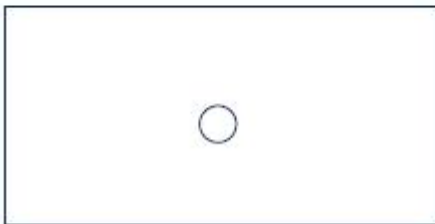

High-power terminal  
1 connection

### Features

- Foot can be snapped on TS 35 DIN rail
- Stud connection
- Housing made from polyamide 6.6 UL 94-V0

### Specifications:

Rated cross-section, mm<sup>2</sup> | AWG: 35 | 14-2

Rated surge voltage, kV | Contamination degree: 8 | 3

Plug gauge acc. to EN 60 947-1 | Flamm. class acc. to UL 94: - | V2

### Connection data

Contact wire range, mm<sup>2</sup>: ≤ 35

Stud Size: M6

DIN 46234/1 cable lug per side mm: 2,5 - 35

DIN 46234/2 cable lugs per side mm: 2,5 - 35

DIN 46235/1 cable lug per side mm: 6,0 - 35

DIN 46235/2 cable lugs per side mm: 6,0 - 25

Torque, Nm: 3,0 - 6,0 12,4