



NO	DESCRIPTION	DATE
△	ADD MIS PART NO.	04.01.04
△	ADD DESCRIPTION ADD 6.2±0.38 66.93±0.38 → 69.35±0.38 61.12±0.13 → 63.5±0.25 52.42±0.13 → 54.83±0.25 ø3.05 → ø3.05±0.25 7.9 → 7.9±0.25 12.55 REF. → 12.55±0.38 2.77 → 2.77±0.38 55.32 REF. → 57.7±0.38 1 → 0.76±0.25 10.72 REF. → 10.72±0.38 11 REF. → 10.85±0.38 3.3 REF. → 2.4±0.5 2.84 → 2.84±0.38 TIN → GOLD MIS PART NO. → P/N	03.14.08
△	CORRECT DIMENSION LINE POSITION	12.02.11
△	CORRECT DIMENSION LINE POSITION	03.05.12
△	GOLD	05.16.13

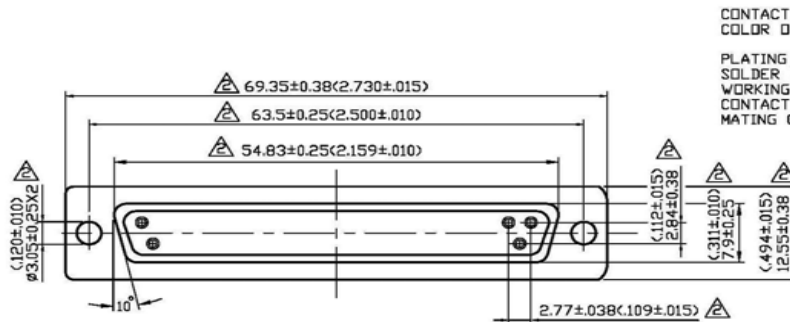

CONTACT TYPE MACHINED CONTACT
 COLOR OF INSULATION BLACK PBT
 PLATING OF CONTACT GOLD
 SOLDER TERMINATIONS GOLD
 WORKING VOLTAGE 500V AC AT SEA LEVEL
 CONTACT RESISTANCE 10m OHM MAX.
 MATING CYCLES 150 TIMES

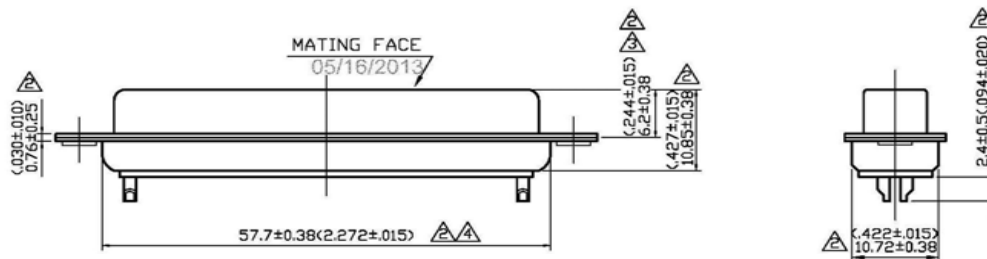

△△ P/N: 544-3884

APPROVED by _____ DATE: _____



DESCRIPTION		D-SUB WITH 37-PIN FEMALE CONNECTOR BY MACHINING						
製圖	DRAWN	TOLERANCE	品名	□50-0037S-M	日期	DATE	版次	REV.
	Yoko	.X ±0.2	TITLE	\ROHS COMPLIANT	02.23.95		A-5	
檢圖	CHECK	.XX ±0.1	單位	mm(in)	DWG.NO.	55-0057		
認定	APPROVAL	.XXX ±0.05	比例	SCALE				
	Angela	ANGLE ±5°						